

1/9/1

DIALOG(R) File 350:Derwent WPIX
(c) 2001 Derwent Info Ltd. All rts. reserv.

Abstracts for
IDS paper # 7

007660729

WPI Acc No: 1988-294661/198842

XRAM Acc No: C88-130567

XRFX Acc No: N88-223646

**Nuclear plant microprocessor control system for motor operated valves -
has computer which periodically calculates final resting position of
moving stem, assuming motor is turned off**

Patent Assignee: ELECTRIC POWER RES INST INC (ELPO)

Inventor: BROOKS B P; LEE R A S

Number of Countries: 014 Number of Patents: 002

Patent Family:

Patent No	Kind	Date	Applicat No	Kind	Date	Week
EP 287299	A	19881019	EP 88303211	A	19880411	198842 B
US 4816987	A	19890328	US 8737414	A	19870413	198915

Priority Applications (No Type Date): US 8737414 A 19870413; US 85750617 A 19850628

Cited Patents: 1.Jnl.Ref; A3...9022; DE 3345528; EP 105203; EP 135754; EP 187963; EP 50960; FR 2330058; FR 2533333; No-SR.Pub

Patent Details:

Patent No	Kind	Lan Pg	Main IPC	Filing Notes
-----------	------	--------	----------	--------------

EP 287299	A	E	24	
-----------	---	---	----	--

Designated States (Regional): AT BE CH DE ES FR GB GR IT LI LU NL SE

US 4816987	A	21
------------	---	----

Abstract (Basic): EP 287299 A

The valve control system has a position detector for the valve stem. A monitor is coupled to the motor and position detector to control the operation of the motor. The monitor has a unit for turning on the motor and a position detector for controlling the operation of the motor. A device turns on the motor which moves the valve stem from its current position to a specified position between the open and closed position of the valve. A computer periodically calculates the final resting position of the moving valve stem, assuming the motor is turned off.

A device turns off the motor when the predicted valve stem position is equal to or beyond the specified valve position. Coupled to the valve is apparatus for controlling a predefined physical quantity. A parametric measuring device generates a signal corresponding to the physical quantity.

USE/ADVANTAGE - Microprocessor based control and diagnostic system for motor operated valves. Motor overload protection is provided by periodically measuring actual load on the motor and turning it off if load exceeds preselected max.

Abstract (Equivalent): US 4816987 A

The valve motor control system comprises; 1) a means for detecting the position of a valve stem 2), a monitor means connected to the motor and position detection means to control the motor operation, whereby the monitor means includes; a) means to switch on the motor and move the valve stem from current position to a specified position between open and closed positions for the valves, b) a computer to periodically, during movement of valve stem, calculate a predicted final stopping position of the valve stem assuming that the motor was switched off and 3) a device to switch the motor off when the predicted valve stem position is equal to or beyond the specified position.

USE/ADVANTAGE - The improved control system for motor operated valves can be used in nuclear facilities for emergency operations e.g. shut-down processes etc. Apart from the control and predictive control, the control system provides diagnostic functions to analyse the valve's performance and aids in diagnosis of valve failure.

Title Terms: NUCLEAR; PLANT; MICROPROCESSOR; CONTROL; SYSTEM; MOTOR;

OPERATE; VALVE; COMPUTER; PERIOD; CALCULATE; FINAL; REST; POSITION; MOVE; STEM; ASSUME; MOTOR; TURN

Derwent Class: K05; Q66

This Page Blank (uspto)

International Patent Classification (Additional): F16K-031/04; F16K-037/00;

G05B-013/02

File Segment: CPI; EngPI

Manual Codes (CPI/A-N): K05-B06

This Page Blank (uspto)



Europäisches Patentamt
European Patent Office
Office européen des brevets

Publication number:

0 287 299
A2

EUROPEAN PATENT APPLICATION

Application number: 88303211.2

Int. Cl.⁴: F16K 37/00 , F16K 31/04

Date of filing: 11.04.88

Priority: 13.04.87 US 37414

Date of publication of application:
19.10.88 Bulletin 88/42

Designated Contracting States:
AT BE CH DE ES FR GB GR IT LI LU NL SE

Applicant: ELECTRIC POWER RESEARCH
INSTITUTE, INC
3412 Hillview Avenue
Palo Alto California 94303(US)

Inventor: Brooks, Boyd P.
219 Danville Drive
Los Gatos California 95030(US)
Inventor: Lee, Robert A.S.
138, Beach Street
Tewksbury Massachusetts 01876(US)

Representative: Jackson, David Spence et al
REDDIE & GROSE 16, Theobalds Road
London, WC1X 8PL(GB)


Microprocessor-based control and diagnostic system for motor operated valves.

A microprocessor (32) periodically tests the status of the stem (40) of the motor operated valve (22), and turns off the valve's motor (24) if certain predefined criteria for the valve stem position and the valve stem load are satisfied. A position sensor (46) provides a valve stem position signal and a predicted stem position signal is computed. The current and predicted positions are compared with a preselected target position. A stem load sensor (48) provides a current valve stem load signal, a predicted stem load is computed and the current and predicted loads are compared with a preselected maximum desirable stem load.

When the control system is being used to fully open and fully close a gate valve, the control logic can use either a predicted position criterion or a predicted stem load criterion to determine when to turn off the valve motor (24). When the control system is being used with a flow control valve, the use of a predicted position criterion minimizes overshoot problems which would cause the motor (24) to be reversed one or more times while moving to a target position.

A motor load sensor (70) allows periodic measuring of the actual load on the motor (24). The motor is turned off if the measured motor load

exceeds any one of a plurality of preselected maximum motor load values for a corresponding predicted period of time.

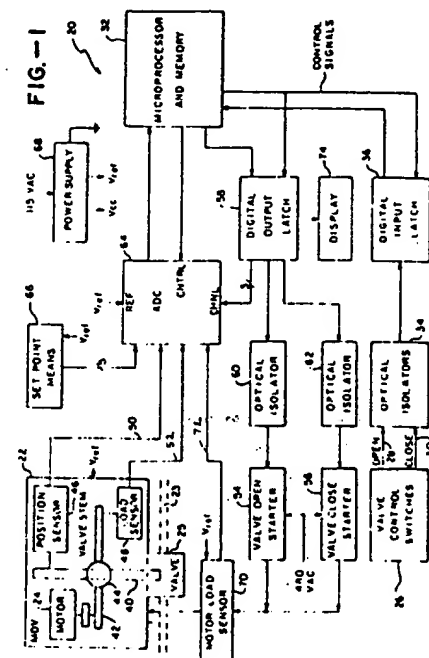

MICROPROCESSOR-BASED CONTROL AND DIAGNOSTIC SYSTEM FOR MOTOR OPERATED VALVES

The present invention relates generally to an improved control system for motor operated valves, and particularly to a microprocessor based control and diagnostic system for motor operated valves.

BACKGROUND OF THE INVENTION

Historically, motor operated valves have been employed in applications where factors such as line size, high pressure, temperature, flow rate, or inaccessible location dictates that other types of valve operators will not suffice. In nuclear power facilities, the additional concerns of radiological exposures, fast emergency system operation, and the required ability to bring the plant to a safe shut-down condition underscore the critical role of properly functioning motor operated valves (MOVs).

In recent years, the issue of MOV reliability has become the subject of increasing concern, particularly in the nuclear power industry. Hundreds of MOV failures have been investigated in different studies.

In one study, Assessment of Motor Operated Valve Failures, INPO-83-037, Institute of Nuclear Power Operations, Atlanta, GA (October, 1983), electromechanical torque switches and limit switches were identified as the components at the root of approximately 32 percent of the documented MOV failures. Mechanical failures (failure to operate, bent stems, damage to valve seats, gear binding and damage) accounted for 22 percent of the MOV failures analyzed in the INPO report. Thus 54 percent of the MOV failures were attributable to electromechanical components within the actuator itself.

As a result, it is clear that the electromechanical components within the motor actuator are in need of improvements. A related problem is the difficulty in accurately setting up the torque and limit switch set points. In particular, prior art torque switches typically have set screws for setting the torque limit points without any accurate mechanism for correlating the set screw position to a specified amount of valve stem load.

In addition to their unreliability, a problem with limit switches on prior art valve motor operators (VMOs) is that they normally provide no information as to position of the valve stem in mid-stroke. Thus it is impossible to ascertain, for example, if the set point is going to be attained momentarily, or if a set point is being approached more rapidly than normal (e.g., because of an overvoltage condition) or more slowly than normal (e.g., because of increased stem packing friction or

gear train binding).

Another shortcoming of prior art valve motor operators is the accuracy of thermal overload protection that is typically provided in VMOs. A snap action bimetallic switch is exposed to an electrical resistance heater through which motor winding current flows. If the motor current increases inordinately, and for a sufficient period of time, the heat from the resistance heater causes the bimetallic switch to open, thereby opening the motor starter coil and shutting down the motor. This method of detecting motor overload is indirect and unreliable. A direct measurement of motor load is much preferable because this would be more consistent with typical motor specifications which include limitations on the length of time that the motor can withstand different overcurrent conditions.

The present invention overcomes many of the shortcomings of prior art valve motor operators. Limit switches are replaced by measurements of actual valve stem position. Torque limit switches are replaced by measurements of valve stem load. Snap action bimetallic switches for motor thermal overload protection are replaced with measurements of actual motor load. All of these measurements are periodically compared by a microprocessor with corresponding set points at least fifty times per second.

A significant feature of the present invention is that it can use successive valve stem position measurements and valve load measurements to predict the valve stem position and valve stem load at a specified time in the future. Using this capability, the control system of the present invention takes the inertia of the system into account by turning off the motor when the predicted future value of either the valve stem position and/or the valve load at a specified time in the future (e.g., 0.20 seconds in the future) exceeds the corresponding set point. Thus motor cutoff can be initiated before the valve reaches or exceeds a set point. This has been found to greatly reduce overshoot problems caused by rotational inertia. When opening or closing a valve, overshoot puts unnecessary stress on the valve and can cause valve failure; when positioning a valve at an intermediate position for flow control, overshoot causes the valve motor to be turned on and off (or reversed) more than necessary, which may be harmful to the motor.

Another benefit of the present invention is that tailoring of the control system to various applications is much simpler than with prior art systems because most adjustments require only the change of parameter values in the control software, or

modification of the software, rather than the redesign of mechanical elements, or rewiring, as is required with prior art equipment.

Yet another benefit of the present invention is that the same information normally used to control valve operation can be used for diagnostic purposes, both during normal valve operation (e.g., to generate a display or printout indicating the condition which caused the last open or close valve operation to be terminated) and to help evaluate system performance.

It is therefore a primary object of the present invention to provide an improved control system for motor operated valves.

Another object of the present invention is to provide a microprocessor based control and diagnostic system for motor operated valves.

Yet another object of the present invention is to provide a control system for motor operated valves which uses successive valve stem position measurements and valve load measurements to predict the valve stem position and valve stem load at a specified time in the future, and using this capability, takes the inertia of the system into account by turning off the motor when the predicted future value of either the valve stem position and/or the valve load exceeds the corresponding set point.

SUMMARY OF THE INVENTION

In summary, the present invention is a valve motor control system, for use with a motor operated valve. The control system provides control, predictive control and diagnostic functions.

The motor operated valve includes a valve stem for opening and closing the valve and a motor for driving the valve stem so as to controllably open and close, or partially open and close, the valve. A valve stem position sensor measures the stem position, a stem load sensor measures the load on the valve stem, and motor load sensor measure the load on the valve motor.

A microprocessor periodically tests the status of the motor operated valve, and turns the valve's motor on and off in response to a command signal or if certain predefined criteria for the valve stem position and the valve stem load are satisfied. The periodic testing by the microprocessor includes the testing of a position criterion (comparing both the current valve stem position signal and a predicted future stem position with a preselected target position); and a stem load criterion (comparing both the current valve stem load and a predicted future stem load with a preselected maximum desirable stem load).

When the control system is being used with a gate valve for fully opening and fully closing a

valve, the control logic can use either a predicted position criterion or a predicted stem load criterion to determine when to turn off the valve motor. When the control system is being used with a flow control valve, the use of a predicted position criterion minimizes overshoot problems which cause the motor to be reversed one or more times while moving to a target position.

Motor overload protection is provided by periodically measuring the actual load on the motor and turning off the motor if the measured motor load exceeds any one of a plurality of preselected maximum motor load values for a corresponding period of time.

The above described motor shut down criteria, i.e., control logic, can be modified easily by introducing changes to the system software.

Further, the control system provides diagnostic functions for analyzing the valve's performance and for aiding in the diagnosis of valve failures.

BRIEF DESCRIPTION OF THE DRAWINGS

Additional objects and features of the invention will be more readily apparent from the following detailed description and appended claims when taken in conjunction with the drawings, in which:

Figure 1 depicts a valve motor control and diagnostic system in accordance with the invention. Figure 1A depicts a preferred embodiment of the apparatus used for specifying system set point parameter values.

Figure 2 is a schematic diagram of the mechanical and electromechanical components of the control system of the present invention. Figure 2A is an exemplary graph representing the variation in stem thrust as a valve is opened and closed.

Figure 3 is a graph representing the predictive control approach used in the present invention to avoid overshooting preselected set points.

Figure 4 depicts a flow chart for a valve motor operator control algorithm.

Figure 5 depicts the display and set point control panel used in the preferred embodiment of the invention.

Figure 6 is a schematic diagram depicting one portion of the process of calibrating the control system of the present invention.

Figure 7 is a schematic diagram depicting how the control system of the present invention is retrofitted onto existing motor operated valves.

Figure 8 schematically depicts the control system for a motor operated flow control valve used to modulate the flow through a valve.

Figure 9 is a flow chart of the motor control algorithm for a flow control valve used to control the temperature of the heat bath shown in Figure 8.

Figures 10 and 11 are flow charts of the algorithms used for partially opening and partially closing a valve to a specified position.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring to Figure 1, there is shown a control system 20 for a motor operated valve (MOV) 22 which controls the flow of fluids through a pipe 23.

The motor operated valve (MOV) 22 includes a valve 25 which is opened and closed by the movement of a valve stem 40. A bidirectional motor 24 is used to drive a worm shaft 42 which is coupled to the valve stem by a worm gear 44. The valve stem 40 moves up (i.e., away from the valve 25) or down (i.e., toward the valve 25) in accordance with the direction in which the worm shaft 42 is rotated by the motor 24.

As will be described in greater detail below, a position sensor 46 coupled to the valve stem 40 generates a position signal on line 50 which indicates the position of the valve stem 40 with respect to the valve 25. A load sensor 48 coupled to the worm shaft 42 generates a load signal on line 52 which corresponds to the load (either compressive or tensile) on the valve stem 40.

The terms valve load, valve stem load, and stem thrust are used interchangeably herein.

A motor load sensor 70 coupled to the line supplying power to the motor 24 generates a motor load signal on line 72 which is proportional to

$V I \cos \theta$

where V is the motor voltage, I is the motor current, and θ is the phase angle between the current and voltage waveforms. The design of such motor load sensors is well known to those skilled in the art, and they are commercially available (e.g., Square D's Motor Load Detector, Type V).

The primary purpose of the control system 20 is to turn the valve's motor 24 on and off so that the valve is moved to a target position. For a gate valve, the control system (1) turns on the valve's motor 24 in the appropriate direction in response to an open or close command; and (2) turns off the motor 24 when either (a) the valve 25 is fully open or fully closed, or (b) a fault condition is detected. For a flow control valve, the control system 20 (1) turns on the valve's motor when a preselected parameter (such as temperature) related to valve position differs from a target value by more than a specified minimum differential; and (2) turns off the motor when the predicted position of the valve 25 is equal to the valve's target position or a position past this target. The control system also provides

diagnostic functions described below.

In the second embodiment of the invention described below, the system controls a valve's position either in response to a measured system parameter or in response to a command which specifies an intermediate valve position, such as a command to open a valve half way.

Valve control switches 26 generate open and close command signals on lines 28 and 30. These switches 26 can be mechanical switches (e.g., mounted on a central control board in an electrical power plant) or can be relays controlled by a computer (not shown) or equivalent system which is controlling the use of the valve 22.

The open and close command signals on lines 28 and 30 are communicated to a programmed microprocessor 32 by means of optical isolators 34 and a digital input latch 36. The optical isolators 34 prevent transient voltages from damaging the low voltage digital circuitry in the control system 20. The digital latch 36, as will be described in more detail later, is controlled by the microprocessor 32 to periodically look for the presence of an open or close command signal when the motor 24 is off.

The motor 24 receives power through two starter coils 54 and 56. Motor starter coil 54 is used to power the motor 24 in the direction needed to open the valve 25; motor starter coil 56 is used to power the motor 24 in the direction needed to close the valve 25. As will be seen below, use of these two starters 54 and 56 is mutually exclusive.

The phrase "to turn on the valve's motor" is used herein to mean turning on either the open or close motor starter 54 or 56 and thereby turning on the power to the motor 24; similarly, the phrase "to turn off the valve's motor" is used herein to mean turning off the power to the motor by shutting off the starter 54 or 56 currently delivering power to the motor 24.

Digital control signals generated by the microprocessor 32 for turning the motor 24 on and off are first latched in a digital output latch 58 which is coupled to the motor starters 54 and 56 by optical isolators 60 and 62, respectively. As indicated earlier, optical isolators are used to prevent transient voltages from damaging the low voltage digital circuitry in the control system 20.

The digital output latch 58 is also used to latch signals used to control a display panel 74. The display 74, which is discussed in more detail below with reference to Figure 5, has a number of labeled LEDs which are used to indicate the state of the motor operated valve 22.

Further, the digital output latch 58 is used by the microprocessor 32 to hold a three-bit channel value which determines which of the eight input signals to the ADC 64 is to be digitized and read by the microprocessor 32.

The heart of the control system 20 is the preprogrammed microprocessor 32. An EPROM (erasable programmable read only memory) is used to store the microprocessor's software. The microprocessor 32 receives information regarding the state of the motor operated valve through an analog to digital converter (ADC) 64.

In the preferred embodiment, the microprocessor 32 also receives set point information from set point means 66 through the ADC 64. Referring temporarily to Figure 1A, the set point means 66 contains five potentiometers for specifying five parameter values: the valve stem positions for a fully open and fully closed valve, the maximum desirable valve stem load when the valve is being opened or closed, and the maximum steady state load for which the motor 24 is rated. The calibration of these potentiometers is discussed below with reference to Figure 6. Further, as will be understood by those skilled in the art, there are a large number of alternate methods by which set point information could be supplied to the microprocessor 32, including, for example, numeric entry through a keyboard or other peripheral device attached to the microprocessor 32.

As will be described in greater detail below, the microprocessor 32 is programmed to monitor the state of the MOV 22 fifty times per second when the MOV is in operation. During each such cycle it compares the current state of the MOV 22 against certain predefined criteria to decide if the motor 24 should be turned off.

Further, the microprocessor 32 is programmed to control the lights (i.e., LEDs) on a display panel 74 so that an operator can visually monitor the state of the MOV 22.

When the MOV is not in operation, the microprocessor 32 continuously monitors the open and close command lines 28 and 30 until one or the other is energized.

A power supply 68 is used to provide a DC reference voltage V_{ref} and a DC supply voltage V_{cc} for the digital circuitry in the control system 20. V_{ref} is used as the reference voltage by the set point means 66, the position sensor 46, load sensor 48 and the motor load sensor 70.

By using the same reference voltage throughout, calibration of the control system 20 is simplified. The set point signals produced by the potentiometers 66a - 66e (see Figure 1A) in the set point means 66 are automatically scaled to the same voltage range as the measurement signals produced by the sensors 46, 48 and 70. As a result, if one measures, for instance, the voltage on the position sensor signal line 50 when the valve 25 is

fully open, the open valve position potentiometer 66b in the set point means 66 is calibrated merely by adjusting the potentiometer until its output voltage is equal to the voltage on line 50.

Mechanical and Electromechanical Configuration

Referring to Figure 2, there is shown a schematic diagram of the mechanical and electromechanical components of the MOV 22 and control system 20 which are needed to generate the valve stem position signal and the valve load signal. Since the general mechanics of motor operated valves are well known to those skilled in the art, only those aspects which are directly relevant to the present invention are described herein.

Motor 24 is coupled, by means of an appropriate set of reduction gears 80, to worm shaft 42 which is coupled by a worm gear 44 to the valve stem 40 of valve 25. The motor 24 is bidirectional and can be used to rotate the worm shaft 42 about its axis in either a clockwise or counterclockwise direction.

The worm shaft 42, the worm gear 44, and the valve stem 40 are all threaded so that rotation of the worm shaft 42 by the motor 24 causes the valve stem 40 to move up or down, depending on the direction in which the worm shaft 42 is rotated.

Movement of the valve stem is measured by a multi-turn potentiometer in position sensor 46. The wiper of this potentiometer is connected by an appropriate gear mechanism 108 so that up and down movement of the valve stem causes a linearly related change in the voltage of the valve stem position signal on line 50.

Referring temporarily to Figure 1A, the set point potentiometers 66b and 66c for specifying the valve open and close positions are multi-turn potentiometers which are identical to the potentiometer in the position sensor 46.

While the valve stem 40 is designed to move relatively freely up and down, the weight of the valve stem and gate, and various sources of friction resist the free movement of the valve stem 40. One source of friction is the packing 102 which is used to seal the valve. In addition, when the valve is fully closed, the valve gate 82 seats against valve seats 84; and when the valve is fully open, the valve's backseat 86 abuts backseat shoulder 88.

The valve load is the amount of compressive or tensile force being applied to the valve stem 40 by the motor 24. The greater the valve load; the more the valve stem 40 resists being moved by rotation of the worm shaft 42.

The worm shaft 42 tends to move laterally when the valve stem 40 resists being moved by the rotation of the worm shaft 42. However, a

spring pack 90, which is rigidly mounted in the valve motor operator's housing, resists movement of the worm shaft 42. Spring seat members 96 and 98 hold the spring pack 90 in place.

Shoulder members 92 and 94 are attached to the worm shaft 42 on either side of the spring pack 90. Shoulder member 92 compresses the spring pack 90 when the worm shaft 42 moves rightward; shoulder member 94 compresses the spring pack 90 when the worm shaft 42 moves leftward.

As is well known, the amount that a spring such as the spring pack 90 will compress is generally a linear function of the force applied to the spring. Thus the amount that the spring pack 90 is compressed will be proportional to the amount of force applied thereto by the worm shaft 42.

Furthermore, the amount of force applied by the worm shaft 42 to the spring pack 90 is proportional the valve stem load. Thus, except for frictional losses, the displacement of the worm shaft from its neutral position (i.e., with the spring pack 90 not compressed) is proportional to the valve stem load.

In order to measure the worm shaft displacement (also called the spring pack displacement) a linear potentiometer is mounted on the end of the worm shaft 42 so that lateral movements of the worm shaft produce move the wiper of the potentiometer in the load sensor 48, thereby producing changes in the voltage level of the valve load signal on line 52.

Referring temporarily to Figure 2A, there is shown a typical graph of the change in worm shaft displacement as a motor operated valve is opened and closed. As shown by curve 104, when the valve begins to close the valve load (which is proportional to the worm shaft displacement) is high. This is because of the relatively large force (generated by an actuator "hammer blow", as discussed below) which is required to unseat the valve from its backseat position. As the valve continues to close, the valve load decreases because the kinetic friction forces which resist movement of the valve stem are generally less than the static friction forces initially holding the valve in an open position. When the valve closes, the motor 24 is generally permitted to continue running for a short while so that the valve gate is firmly pushed into the gate seat 84, which causes the valve load and the worm shaft displacement to increase rapidly.

Curve 106 shows the change in valve load and worm shaft displacement when the valve is opened. This curve 106 follows the same pattern as the curve 104 for closing the valve 22, except that tensile valve stem forces are involved instead of compressive forces, and thus the worm shaft is displaced in the opposite direction.

It should be noted that when a motor operated

valve 22 is opened, it is generally preferable to stop the motor 24 when valve stem reaches a specified position, whereas it is generally preferable when the valve 25 is being closed to continue running the motor after the valve stem reaches the nominal closed position until the valve stem load reaches a specified value. The difference is that to fully close a valve 25 it is best to firmly push the valve gate into the gate seat, whereas to fully open a valve 25 it is only necessary to move the valve gate out of the way and it is not necessary to firmly push the valve stem's backseat 86 into the backseat shoulder 88.

A shorthand way of restating the above rule of thumb is that valve closure is generally governed by torque priority logic while valve opening is generally governed by position priority logic. As a result, valve closure is generally accompanied by much greater valve stem loads than valve opening. Accordingly, as shown in Figure 1A, the preferred embodiment provides separate potentiometers 66a and 66d for specifying the maximum desirable valve load while opening and closing the valve 25.

Predictive Control

Referring to Figure 3, an important feature of the present invention is the ability to avoid overshoot problems caused by the rotational inertia of the motor 24 and the reduction gears 80. In prior art devices, the motor 24 is turned off when either a specified valve stem position is reached or a specified valve stem load is reached. However, rotational inertia prevents the motor 24 from stopping instantaneously when it is turned off. Thus the valve stem 40 tends to "overshoot" the specified position and load set points.

Using the present invention, the rotational inertia of the motor 24 and reduction gears 80 is taken into account by predicting either the valve stem position and/or the valve load which will be achieved at a specified time in the future.

For instance, tests by the inventor on a particular valve showed that the inertia of the motor operated valve 22 caused the worm shaft 42 to continue turning after motor cutoff an amount equivalent to the amount it would turn in 200 to 250 milliseconds at full power. To account for the inertia of this particular motor operated valve, the control system was designed to predict the valve stem position and valve load 200 milliseconds in the future. Then, for example, while closing the valve, if the predicted valve load exceeds the specified maximum desirable valve load the motor 24 is immediately turned off. Empirical testing showed that not only did the valve consistently fully close, but also that overshoot problems were largely

eliminated. The full use of predicted position and load in the preferred embodiment are explained below with reference to Figure 4.

The principal of anticipatory or predictive control is illustrated in Figure 3. The goal is to predict the value of a control variable CV at a specified time in the future. Also, it is assumed that at the "present" time the control variable being monitored has not exceeded its set point.

Curve 112 represents the value of the control variable CV as a function of time if the driving force for the control variable (i.e., motor 24) is removed when the control variable CV reaches its set point 114. As shown, due to system inertia, the control variable CV reaches a value represented by point 116 which far exceeds the CV set point 114.

Using the most straightforward approach, an approximation of the first derivative of the control variable CV with respect to time is calculated by subtracting the last measured value of the control value from the "present" value, and dividing by the sample interval dt:

$$\text{rate of rise} = (CV_{\text{present}} - CV_{\text{last}}) / dt. \quad (\text{Eq.1})$$

In this manner, an instantaneous rate of rise of the control variable (e.g., stem thrust) is derived. This rate of rise is represented by dashed line 118. Assuming that the driving force for the control variable were removed at the "present" time, the future value of the control variable, say n sampling intervals past the present time, could be approximated by the expression:

$$CV_{\text{future}} = CV_{\text{present}} + (CV_{\text{present}} - CV_{\text{last}}) * n. \quad (\text{Eq.2})$$

The actual value of the control variable CV after n time intervals will be somewhat less than calculated above because frictional forces will eventually bring system dynamics to a halt. See for example curve 120. Used properly, however, an appropriate value of n in equation Eq.2 will approximate the steady state value of that the control variable CV will achieve if the driving force for the control variable were removed at the "present" time.

In the preferred embodiment of the invention, each sampling interval dt lasts 20 milliseconds. For certain large motor operated valves the best value of n was found to be ten, corresponding to a prediction time of 200 milliseconds.

As will be understood by those skilled in the art, considerably more sophisticated predictive control calculations could be performed by deriving a more accurate model of the change in the control variable CV after the driving force for the control variable is removed. For instance, the rate of

change of the control variable function could be assumed to decelerate at a specified rate which is derived by empirical testing. However, it has been found by the inventor that the first order approach depicted in Figure 3 works quite well in the context of motor operated valves, yielding significant performance improvements over the prior art.

In the preferred embodiment, the above described predictive approach is applied, when the valve is being closed, to the valve stem thrust; and when the valve is being opened, to both the valve stem position and to the valve stem thrust.

In alternate embodiments of the invention, however, it may be useful to use motor load as a predictive control variable. Another potential predictive control variable would be a mixed function of the stem thrust, valve stem position and/or the motor load. Generally, the predictive approach explained below can be applied to any control variable which can be used to reliably predict the effect of rotational inertia on fully opening and closing the valve 25 after motor cutoff.

Control Algorithm for Opening and Closing Gate Valve

Before discussing the preferred control algorithm for opening and closing a gate valve, three phenomena accounted for in the algorithm need to be explained: inrush current, motor overload, and the hammer blow associated with the unseating of a valve disc.

When an open or close command is received and the motor 24 is first turned on, the motor 24 tends to draw significantly more current than during normal steady state operation. This inrush current typically lasts less than 200 milliseconds, although the exact amount of time will vary from motor to motor. To avoid erroneous motor overload fault detection caused by inrush current, monitoring for motor overload is suspended during a period of predefined length (200 milliseconds in the preferred embodiment) beginning when the motor is first turned on.

Another phenomenon that occurs when an open or close command is first received is that an actuator hammer blow is needed to unseat the valve disc. Actuator hammer blows result from free motion in the actuator (i.e., motor and reduction gear) drive mechanism when the actuator is started, which results in an impact on the heavy lugs on the worm gear as the drive motor reaches its rated rotational velocity.

This hammer blow will generally result in a stem thrust which does not exceed the maximum stem thrust set point. Therefore, such hammer blows usually do not represent a threat to the

integrity of the valve 25 and do not warrant shut-down of the motor 24.

Actuator hammer blows are generally characterized by a sharp, short rise in the stem thrust. See, for example, Figure 2A. To distinguish hammer blows from real stem thrust conditions warranting motor shutdown, the predictive control portion of the control algorithm of the preferred embodiment ignores stem thrust transients of less than 40 milliseconds duration (i.e., which last less than two sample periods, each of which are 20 milliseconds long). In particular, the control algorithm is designed to require that the predicted stem thrust exceed the set point level for two consecutive sample time periods. The result of this requirement is that the system ignores the rapid changes in the slope of the stem thrust signal which are characteristic of hammer blows.

Motor overload is best tested using a multi-level test because a mild overload (e.g., 200% of the motor's normal steady state current) can be tolerated for much longer (e.g., 1 minute) than a locked rotor condition which typically draws 600% of motor's normal maximum current and can typically be allowed to persist for only a few seconds, at most, before serious damage to the motor will occur. Therefore in the preferred embodiment a two level motor overload test is provided: (1) simple motor overload (i.e., where measured motor load exceeds the motor load set point) is allowed to persist for a predetermined time period (e.g., 5 seconds) before a warning signal is generated; (2) but a motor overload of over 600% of the motor load set point is allowed to persist for only a second predetermined time period (e.g., 100 milliseconds) before the motor is shut off.

The above mentioned warning signal can be any signal, including an audible alarm, which is designed to bring to the attention of the persons supervising the operation of the system that the valve motor needs inspection.

As will be understood by those skilled in the art, a number of other motor overload detection and response algorithms could be used in alternate embodiments of the invention. The method used will depend both on the characteristics of the motor used and on a variety of external factors, including the availability of maintenance personnel and the relative cost of valve and motor degradation caused by running at low overload levels compared with the cost of system shut down.

Referring to Figure 4, while the valve motor is inactive, the microprocessor 32 continuously monitors the open and close command lines 28 and 30 (see Figure 1) until the next open or close command is received (box 130).

After a close valve command is received, the process of closing the valve is begun by causing

the microprocessor to read in all the set point values and the valve stem position, the stem thrust, and the motor load (box 134).

Since the algorithm for closing an MOV is usually governed by stem thrust priority (although in other embodiments of the invention it could be governed by position priority if desired), the first test (box 136) is to determine if the measured stem thrust exceeds the set point for the maximum desirable valve load when the valve is being closed. If so, the motor is disabled and the display is updated (box 138). The process of updating the display will be described below with reference to Figure 5.

Note that if the valve is already closed when a close valve command is received, the residual stem thrust will generally exceed the stem thrust set point and the control process will immediately proceed to box 138 without the motor ever being started.

The second test (box 140) is to determine if the predicted future stem thrust exceeds the stem thrust set point, but allowing for fast transients which are identified as hammer blows (box 142), as discussed above.

As noted briefly above, in the preferred embodiment, using certain large motor operated valves which are typical of those used in electrical power plants, a sampling cycle time of 20 milliseconds (i.e., $dt = 20$ milliseconds in equation Eq.1) is used. This means that the status of the valve is monitored and tested once each 20 milliseconds (i.e., 50 times per second). For predictive purposes, a value of $n = 10$ is used in equation Eq.2, corresponding to predicting the value of the control variables 200 milliseconds in the future.

If the predicted stem thrust is too high (box 140), and this is not due to a hammer blow (box 142), the motor is stopped (box 138).

The final test (box 144) is the two level motor load test described above, with allowance for an initial inrush current (box 146).

If no fault conditions are detected, the motor is enabled (box 132) and the display is updated (box 148), as will be described below with reference to Figure 5. Subsequent passes through the control sequence will allow continued motor operation until a set point is reached or predicted.

Since the monitoring and testing process (boxes 134 through 148) for one sampling period takes only approximately 1.7 milliseconds in the preferred embodiment, the system idles (box 150) for the remaining 18.3 milliseconds of each 20 millisecond sampling cycle.

After the motor 24 is turned off (box 138) the microprocessor waits for the next open or close command (box 130).

Since the control algorithm for opening a valve

is similar in many respects to the control algorithm described above for closing a valve, only the differences in the two algorithms will be described.

After an open valve command is received, the process of opening the valve is begun by causing the microprocessor to read in all the set point values and the valve stem position, the stem thrust, and the motor load (box 154).

Since the algorithm for opening an MOV is usually governed by position priority (although in other embodiments of the invention it could be governed by thrust priority if desired), the first test (box 156) is to determine if the measured valve stem position corresponds to a fully open valve. Restated, the system tests whether the measured valve stem position is less than or equal to the set point for a fully open valve. If so, the motor is disabled (box 138).

Note that if the valve is already open when an open valve command is received, the stem position will generally correspond to a fully open valve and the control process will immediately proceed to box 138 without the motor ever being started.

The second test (box 158) is to determine if the predicted future valve stem position corresponds to a fully open valve. The predicted value is the value 200 milliseconds in the future, using the prediction method described above with reference to Figure 3. This second test helps eliminate or reduce potential damage to the valve caused by backseating.

The third through fifth tests (boxes 160 through 168) correspond to the three tests (boxes 136 through 146) of the close valve algorithm described above. The only difference is that the set point for the maximum desirable stem thrust while opening the valve is used instead of the stem thrust set point for closing the valve.

If no faults are detected, the motor is enabled (box 152), the display is updated (box 170) and then the system idles (box 172) until the beginning of the next 20 millisecond sampling period.

As will be clear to those skilled in the art, in alternate embodiments of the invention, many modifications could be made to the control algorithm to fit the particular circumstances in which the invention is being used. For instance, somewhat different tests could be used, including tests for additional or different fault conditions; a different testing order could be used; and/or the sample cycle time could be decreased to allow for quicker detection of certain fault conditions.

Display and Set Point Panel

Referring to Figure 5, there is shown a schematic representation of the display and set point panel of the preferred embodiment. In the preferred embodiment, the set point panel 182 is physically located behind the display panel 180 to reduce the chance of the set points being inadvertently changed.

The set point panel contains five dials 186a - 186e for setting the wiper position of the five set point potentiometers 66a - 66e shown in Figure 1A.

A button 188a - 188e next to each dial is used to connect a digital voltmeter (not shown) behind the panel 182 to the corresponding potentiometer so that the setting of the corresponding potentiometer can be seen on the five digit display 190 of the digital voltmeter.

The display panel 180 has four sections. The top section is used to continuously display the current position of the valve stem and the current value of the stem thrust.

The current stem position is representing by energizing one of twelve LEDs 192. This enables the operator to see, for instance, if the valve stem has stopped in mid-stroke.

The current value of the stem thrust is represented by energizing a number of LEDs 194 which is proportional to the measured stem thrust. Compressive stem thrust is represented by energizing LEDs starting on the left side of the line of LEDs 194, while tensile stem thrust is represented by energizing LEDs starting on the right side.

Referring again to Figure 4, both the stem position and stem thrust displays are updated once each sampling cycle at box 148 or 170. The remaining portions of the display panel are updated each time the motor is stopped (box 138).

The Open Limit LED 196 is energized if the valve stem position indicates that the valve is fully open. The Closed Limit LED 198 is energized if the valve stem position indicates that the valve is fully closed.

The Alarm LED 200 is energized if any of the following fault conditions occurs: the valve is neither fully open nor fully closed after the motor is turned off; a motor overload condition was detected; or the stroke time (i.e., the time it took to open or close the valve) exceeds a predefined time limit. In the preferred embodiment, when the Alarm LED 200 is energized the system also generates an audible alarm (using a speaker not shown in the Figures).

At the end of each sample period, one of the Thrust, Position and Motor Load LEDs 202, 204 or 206 is energized, in accordance with the test condition that caused the motor to be shut off. Also, the Rate of Rise LED 208 is energized if the motor

was shut off in response to a predictive control test. In an alternate embodiment of the invention, an alarm or warning message could be generated whenever the motor is shut in response to any of the non-predictive control tests.

Finally, the length of time from when a open or close valve command was received to the time when the motor was shut off is displayed on a digital display 210 labelled Stroke Time. In the preferred embodiment, the microprocessor 32 is coupled to a standard clock chip (not shown in the Figures) for the purpose of making these time measurements.

As will be understood by those skilled in the art, the diagnostic functions provided in the preferred embodiment represent only a small subset of the diagnostic functions which could be provided in alternate embodiments. For example, using the measurement information available to the system the control system could compare the valve's performance against a variety of performance criteria. Further, the microprocessor 32 could be connected via a modem or equivalent device to a central computer and could be programmed to send valve performance data to that central computer for trend analysis, documentation of valve condition, valve failure analysis, and for analysis aimed at predicting the need for preventative maintenance procedures.

Control System Calibration

As indicated above, the use of potentiometers as set point selectors allows the selection of set point voltage values which are equal to the maximum (or minimum, in one instance) voltage values to be measured by the position, stem thrust and motor load sensors.

The calibration of the valve stem potentiometers is quite simple. Referring to Figure 1, the voltage on the position sensor signal line 50 is measured when the valve 25 is fully open, and when the valve is fully closed. Then the corresponding potentiometers in the set point means 66 (see Figure 1A) are calibrated merely by adjusting the potentiometers until the output voltage of each is equal to the voltage that was measured on line 50 when the valve was fully open and fully closed.

The calibration of the motor load potentiometer can be done as follows. Using the system's motor load detector, the steady state motor load signal during normal motor operation is measured and the motor load potentiometer is set a value equal to the measured motor load signal. This calibration method is preferred for its simplicity. Also, it enables the generation of warnings when the motor exceeds normal operating level by a specified margin (e.g.,

100 per cent), a test which is often more sensitive and more meaningful than determining when the motor load exceeds the manufacturer's maximum load specifications.

5 An alternate calibration method, keyed to the manufacturer's maximum load specifications is as follows. Using an AC ammeter, the current drawn by the motor is measured during a test run; and the voltage of the motor load signal on line 72 is also measured. Then the motor load potentiometer is set to a value equal to the measured motor load signal voltage multiplied by whatever factor would be required to increase the measured motor current to the motor's maximum rated steady state current.

10 Referring to Figure 6, there is shown is a schematic diagram depicting the process of calibrating the stem thrust set point potentiometers of the control system 20. A laboratory load cell 130 is temporarily mounted on the valve body as shown in Figure 6. A length of bar stock 134 provides physical contact between the top of the valve stem 40 and the load sensing surface 132 of the load cell 130.

25 The motor is activated so as to withdraw the valve stem 40 from the valve, thereby pressing the bar 134 into the load cell 130. As the load cell output rises, both the output voltage of the linear slide potentiometer 136 in the load sensor 48 and the stem thrust as measured by the load cell 130 are recorded. From these measurements, the correlation between load sensor output and actual force in the valve stem is derived. The correlation will generally take the form of

$$\text{load sensor voltage} = k_1 + (k_2 \cdot \text{stem thrust}) \quad (\text{Eq.3})$$

40 where k_1 and k_2 are constants derived by plotting the data recorded and finding the best line which fits the data.

45 Then, using equation Eq.3 and the valve manufacturer's specifications for the maximum desirable compressive and tensile stem thrust, the two stem thrust potentiometers are set to their corresponding values.

Retrofitting Existing Motor Operated Valves

50 Referring to Figure 7, there is shown a schematic diagram depicting how the control system of the present invention is retrofitted onto existing motor operated valves.

55 First, the limit and torque switches 150, 152, 154 formerly used to turn the valve motor 24 off are bypassed by short circuit lines 156 and 158.

The open and closing latching contacts 160

and 162, which are standard momentary switches commonly used with MOVs can be left unchanged. Similarly, the interposing contacts 164 and 166, which are used to prevent the valve open starter from being activated when the valve close starter is already energized, and vice versa, should be left unchanged.

Then open and close power triacs 168 and 170 are connected to the valve open and valve close starters 54 and 56 (see Figure 1). Control signals, conveyed from the microprocessor 32 via optical isolators 60 and 62, are used to turn the valve motor 24 off and on by controlling the voltage on the gates of the two triacs 168 and 170.

Finally, the 115 VAC supply voltage used to power the motor starter coils is connected to an AC to DC converter to supply DC power (V_{cc}) and a DC reference voltage V_{ref} for use by the control system 20.

Control Algorithm for Flow Control Valve

Referring to Figure 8, flow control valves are generally used to modulate the flow through a pipe. In Figure 8, a flow control valve 120 with a motor operator 122 is being used to control the flow of cold water through a pipe 124. The water is being used to cool a heat bath 126, such as a heat sink in an electrical power generation plant.

A temperature sensor 128, namely a thermocouple, is used to measure the temperature of the heat bath 126. As is standard, the analog signal developed by the thermocouple 128 is converted into a digital temperature value by the microprocessor in the control system 20.

The flow of water is dynamically changed to maintain the temperature of the heat bath 126 within a specified target temperature range. Thus the flow of water is adjusted when either the amount of heat flowing into the heat bath 126 changes or the temperature of the water in pipe 124 changes enough to change the measured temperature outside its specified target range.

In the preferred embodiment, the control system 20 is given a target temperature T_{target} , and a temperature deadband Δ_{min} .

As long as the measured temperature is within the specified range, $T_{target} \pm \Delta_{min}$, the valve's position need not be adjusted.

As indicated in the discussion of Figure 2, the valve stem position signal 50 generated by the valve motor operator 22 is linearly related to the valve stem's position. Thus

$$Y = A + B \cdot Vps \quad (\text{Eq.4})$$

where Y is the valve stem position, Vps is the value

of the valve stem position signal, and A and B are constants. For instance, the valve stem position signal might vary between 4 milliamps for a fully closed valve and 20 milliamps for a fully open valve. If Y is equal to 0 for a fully closed valve, and 8 for a fully open valve, then $A = -2000$, and $B = 500$.

After the valve motor is turned on, the motor is turned back off when the predicted valve stem position Y_F equals or is beyond the target stem position Y_{target} .

When the valve motor is turned on, the valve's position is monitored 50 times per second (i.e., once every 20 milliseconds). As explained above with reference to Figure 3, the predicted valve stem position Y_F in the preferred embodiment is equal to the current valve stem position plus the distance that the stem will move in 200 milliseconds if it were to continue moving at its current rate:

$$Y_F = Y + (Y - Y_L) \cdot 10 \quad (\text{Eq.5})$$

where Y is the current valve stem position and Y_L was the measured valve stem position 20 milliseconds ago.

In alternate embodiments of the invention, a different computation could be performed to predict the valve stem's resting position if the valve's motor were turned off now. In particular, a formula such as

$$Y_F = Y + a + b(Y - Y_L) + c(Y - Y_L)^2 + \quad (\text{Eq.6})$$

could be used, and a series of measurements could be performed on the valve to enable calculation of the coefficients a , b , c ,

If the bath temperature is found to be outside the specified target temperature range, then the valve stem position is moved to a new target position Y_{target} . To calculate the new target position Y_{target} , the preferred embodiment makes a simple assumption: that for small temperature adjustments, the bath temperature T is linearly related to the valve stem position. Thus to change the current temperature T to T_{target} , the valve stem position is moved to a target Y_{target} position calculated as follows:

$$Y_{target} = Y + (T_{target} - T) \cdot \text{slope} \quad (\text{Eq.7})$$

$$\text{and slope} = (Y - Y_0) / (T - T_0) \quad (\text{Eq.8})$$

where Y and T are the current stem position and bath temperature, and Y_0 and T_0 are the stem position and bath temperature measured before the last time that the valve stem was moved.

Clearly, in alternate embodiments of the inven-

tion, a more complex formula for the relationship between the valve stem position and the bath temperature could be used, such as

$$Y_{\text{target}} = Y + A(T_{\text{target}} - T) + B(T_{\text{target}} - T)^2 + \dots \quad (Eq.9)$$

As would be expected, after the valve's position is changed it takes time for the temperature of the heat bath 128 to settle down. Thus, after the valve stem position is adjusted, the control system idles for a specified time period X_{settle} (5 minutes in the preferred embodiment) before the temperature is measured to see if it is within the specified target temperature range. If it is, the system idles until the measured temperature is outside the target temperature range; otherwise a new target stem position is calculated and the valve motor is turned on to move the valve stem in the appropriate direction.

Figure 9 is a flow chart of the motor control algorithm for a flow control valve used to control the temperature of the heat bath shown in Figure 8. When the control system 20 is first turned on or is reset the system idles (boxes 140 - 146) until the measured bath temperature T_1 falls outside the specified target temperature range.

The first time that the valve stem needs to be moved, the current valve stem position Y_1 is measured (box 148) and the valve motor is turned on in the proper direction for a short period of time (box 150 or 152). Then the bath temperature is allowed to settle (box 154), the valve stem position Y_2 is measured (box 156), the bath temperature T_2 is measured, and the slope of the valve position function is calculated (box 158):

$$\text{slope} = (Y_2 - Y_1) / (T_2 - T_1). \quad (Eq.10)$$

Now that the valve position function has been initialized, the control system enters the main loop of the control procedure. As before, the system idles (boxes 160 - 162) until the measured bath temperature T_2 falls outside the specified target temperature range.

When the bath temperature is outside its specified range (box 160), a new target valve stem position Y_{target} is calculated (box 164) as explained above. Also the current stem position and bath temperature are stored in Y_1 and T_1 for later use.

Then the valve stem is moved to its new target position by calling either the Partial Open (box 166) or the Partial Close (box 168) routines (described below with reference to Figures 10 and 11).

After the valve stem has been moved and the system has idled (box 170) long enough for the bath temperature to have adjusted, the slope of the valve position function is updated (box 172) and

the main loop starts over by testing to see if the bath temperature is within the specified target range (box 160).

Figure 10 is the flow chart of the preferred algorithm for partially opening a valve to a specified position Y_{target} . As a preliminary precaution, this routine checks to see if the target position Y_{target} is equal to or beyond the valve's fully open position Y_{open} (box 180). If so, a warning message is generated and the Open routine (shown in Figure 4) for fully opening the valve is called (box 182). Note that the flow control valve 120 should normally be designed (i.e., sized) so that it will never have to be fully opened or closed in order to properly modulate the bath temperature. Therefore if the calculated target position equals or goes beyond the valve's fully open or closed positions a warning message is generated so that the user or plant operator knows that some part of the system may not be operating correctly.

Assuming that a valid target position was specified, the motor is turned on in open-valve direction (box 184). Then, periodically (e.g., every 20 milliseconds) (box 186), the system calculates the predicted future position Y_F of the valve were the motor to be turned off immediately (box 188) using the calculations described above. If either the current or the predicted valve position are equal to or beyond the target valve position (box 190) the motor is turned off and the VMO display (see Figure 5) is updated (box 192).

If neither the current nor the predicted valve position are equal to or beyond the target valve position (box 190) the process continues by idling briefly before measuring the current position and calculating the predicted valve position again (box 188). This procedure continues until the motor is turned off and control is passed back to the main control loop shown in Figure 9.

The Partial Close control routine, shown in Figure 11, is essentially the same as the Partial Open routine except that the motor is turned on in the close valve direction and the valve position tests use the opposite sign.

In summary, the Partial Open and Close control routines move the valve stem close to a specified or calculated target position by taking the VMO's inertia into account when determining when to shut off the valve's motor. The main control routine shown in Figure 9 uses the Partial Open and Close routines to modulate the flow of water through a pipe (see Figure 8) so as to maintain the temperature in a heat bath within a specified range.

In other embodiments of the flow control aspect of the present invention, the valve stem's target position could be made a function of any physical quantity which is controlled by or which reacts to the flow through the valve.

While the present invention has been described with reference to a few specific embodiments, the description is illustrative of the invention and is not to be construed as limiting the invention. Various modifications may occur to those skilled in the art without departing from the true spirit and scope of the invention as defined by the appended claims.

Claims

1. A valve motor control system for use with a motor operated valve, said motor operated valve including a valve having a valve stem for opening and closing said valve, and a motor for driving said valve stem so as to controllably open and close said valve; said valve motor control system comprising:

position detection means for detecting the position of said valve stem;

monitor means coupled to said motor and said position detection means for controlling the operation of said motor, said monitor means including:

means for turning on said motor to move said valve stem from its current position to a specified position which is between the open and closed positions for said valve; and

computer means for periodically, as said valve stem is moving, calculating a predicted final resting position of said valve stem assuming that said motor were turned off; and

means for turning off said motor when said predicted valve stem position is equal to or beyond said specified valve position.

2. The valve motor control system of Claim 1 wherein

said valve is coupled to apparatus for controlling a predefined physical quantity;

said control system includes parameteric measuring means for generating a measurement signal corresponding to said physical quantity;

said computer means is coupled to said parameteric measuring means, and includes target computing means for computing, when said measurement signal is outside a specified target range, a target valve stem position corresponding to a measurement signal closer to said specified target range than the current value of said measurement signal; and

said monitor means includes means for turning on said motor to move said valve stem to said target valve stem position.

3. The valve motor control system of Claim 1 wherein

said valve controls the flow of a fluid through a heat bath,

said control system includes temperature

measuring means for measuring and generating a temperature measurement signal corresponding to the temperature in said heat bath;

said computer means is coupled to said temperature measuring means, and includes target computing means for computing, when said measurement signal is outside a specified target range, a target valve stem position corresponding to a temperature measurement signal closer to said specified target range than the current value of said temperature measurement signal; and

said monitor means includes means for turning on said motor to move said valve stem to said target valve stem position.

4. The valve motor control system of Claim 3 wherein

said system includes load means for measuring the load on said valve stem and producing a valve stem load signal;

said computer means is coupled to said load means and includes load monitoring means for periodically

comparing said valve stem load signal with a preselected maximum desirable stem load, and generating a turn off signal when said valve stem load signal exceeds said maximum stem load; and

calculating the rate of change of said valve stem load signal, using said rate of change to predict the load on said valve stem at a predefined time in the future, and generating a turn off signal when said predicted valve stem load exceeds said maximum stem load;

said monitor means includes means for turning off said motor when said computer means generates a turn off signal.

5. The valve motor control system of Claim 1 wherein

said system includes load means for measuring the load on said valve stem and producing a valve stem load signal;

said computer means is coupled to said load means and includes load monitoring means for periodically

comparing said valve stem load signal with a preselected maximum desirable stem load, and generating a turn off signal when said valve stem load signal exceeds said maximum stem load; and

calculating the rate of change of said valve stem load signal, using said rate of change to predict the load on said valve stem at a predefined time in the future, and generating a turn off signal when said predicted valve stem load exceeds said maximum stem load;

said monitor means includes means for turning off said motor when said computer means generates a turn off signal.

6. The valve motor control system of Claim 5, wherein said load monitoring means in said computer means includes means for preventing the generation of a turn off signal for a limited period of time, when said valve stem is being unseated, even though said load on said valve stem exceeds said preselected maximum desirable stem load.

7. A method of controlling a motor operated valve having a valve stem for opening and closing said valve, and motor means for driving said valve stem so as to controllably open and close said valve; the steps of the method comprising:

measuring the position of said valve stem;

turning on said motor to move said valve stem from its current position toward a specified position;

periodically, as said valve stem is moving, calculating a predicted final resting position of said valve stem assuming that said motor were turned off; and

turning off said motor when said predicted valve stem position is equal to or beyond said specified valve position.

8. The method of Claim 7 wherein

said valve is coupled to apparatus for controlling a predefined physical quantity; and

said method includes the steps of:

generating a measurement signal corresponding to said physical quantity; and

when said measurement signal is outside a specified target range, computing a target valve stem position corresponding to a measurement signal closer to said specified target range than the current value of said measurement signal, and turning on said motor to move said valve stem to said target valve stem position.

9. The method of Claim 7 wherein

said valve controls the flow of a fluid through a heat bath; and

said method includes the steps of:

measuring and generating a temperature measurement signal corresponding to the temperature in said heat bath; and

when said temperature measurement signal is outside a specified target range, computing a target valve stem position corresponding to a temperature measurement signal closer to said specified target range than the current value of said temperature measurement signal, and turning on said motor to move said valve stem to said target valve stem position.

10. The method of Claim 9 wherein

said motor operated valve includes load means for measuring the load on said valve stem and producing a valve stem load signal; and

said method includes the steps of:

periodically comparing said valve stem load signal with a preselected maximum desirable stem

load, and generating a turn off signal when said valve stem load signal exceeds said maximum stem load;

periodically calculating the rate of change of said valve stem load signal, using said rate of change to predict the load on said valve stem at a predefined time in the future, and generating a turn off signal when said predicted valve stem load exceeds said maximum stem load; and

turning off said motor when said computer means generates a turn off signal.

11. The method of Claim 7 wherein

said motor operated valve includes load means for measuring the load on said valve stem and producing a valve stem load signal; and

said method includes the steps of:

periodically comparing said valve stem load signal with a preselected maximum desirable stem load, and generating a turn off signal when said valve stem load signal exceeds said maximum stem load;


periodically calculating the rate of change of said valve stem load signal, using said rate of change to predict the load on said valve stem at a predefined time in the future, and generating a turn off signal when said predicted valve stem load exceeds said maximum stem load; and

turning off said motor when said computer means generates a turn off signal.

12. The method of Claim 11, further including the step of:

preventing the generation of a turn off signal for a limited period of time, when said valve stem is being unseated, even though said load on said valve stem exceeds said preselected maximum desirable stem load.

FIG. -1

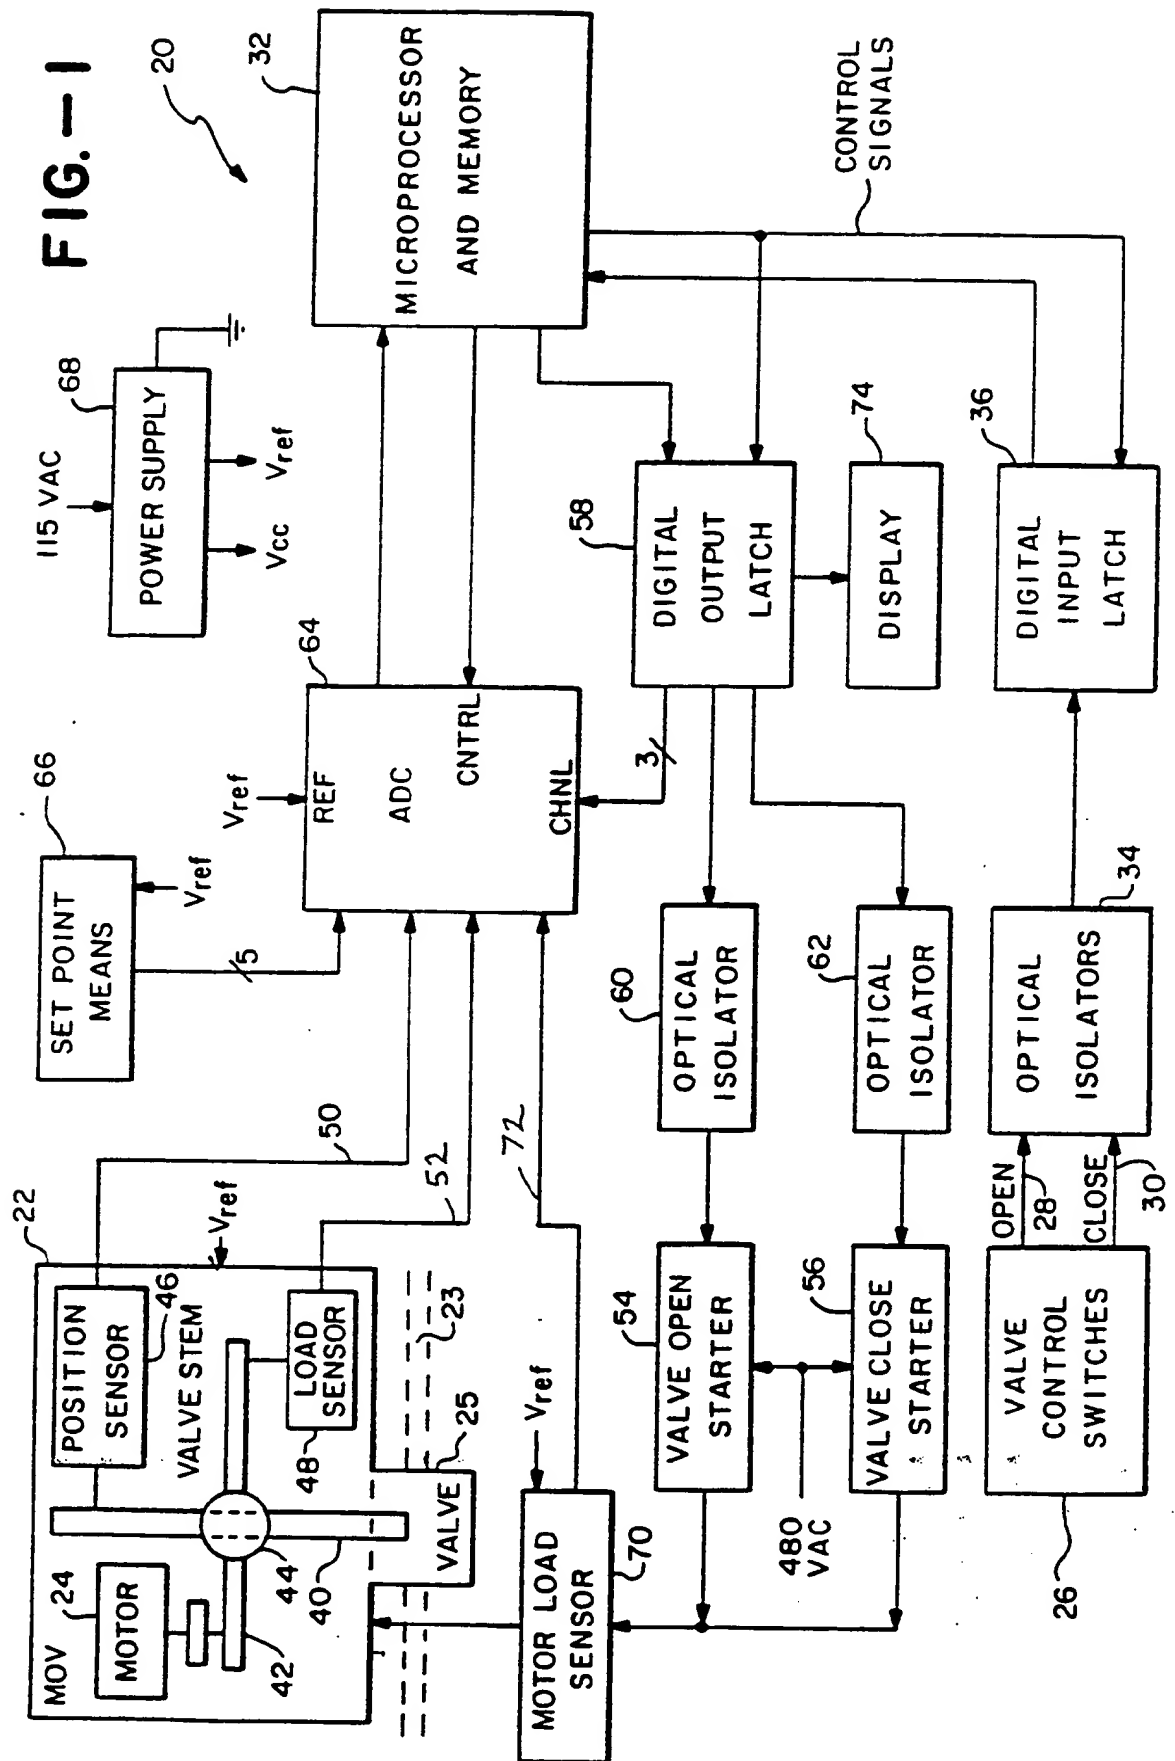

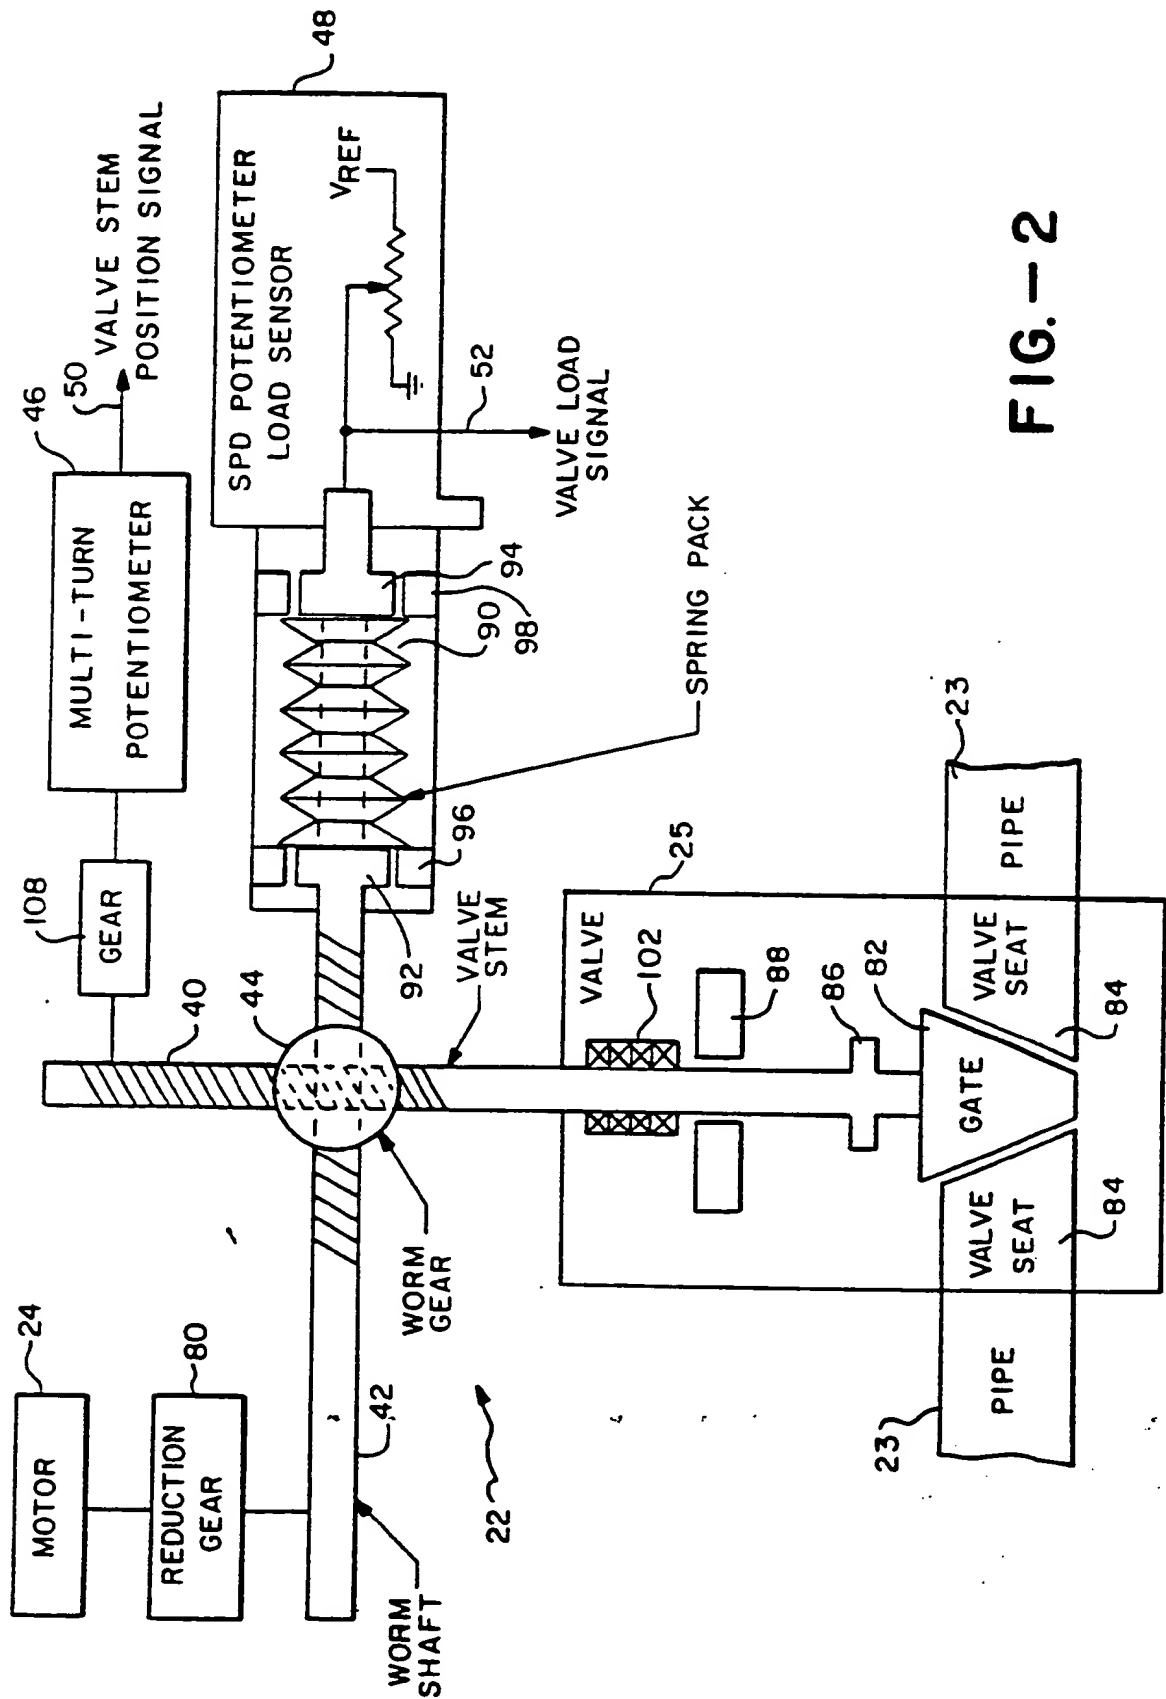


FIG.-2

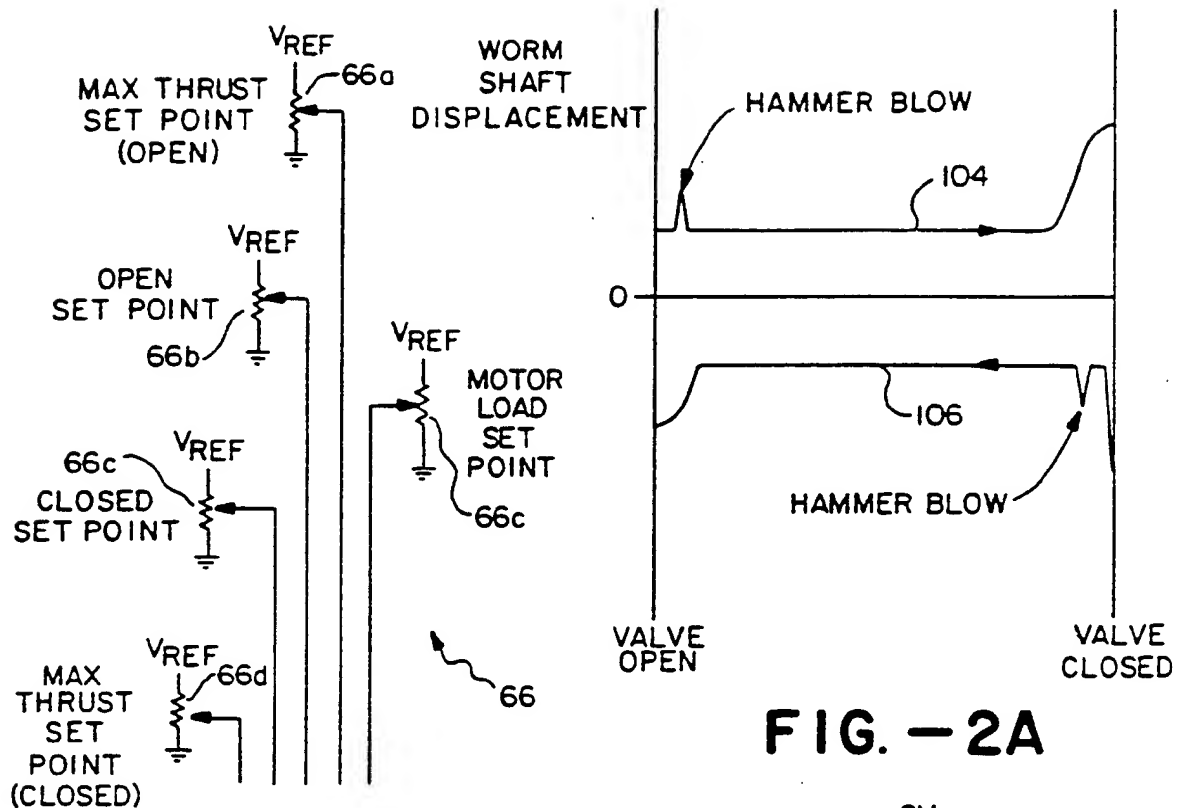
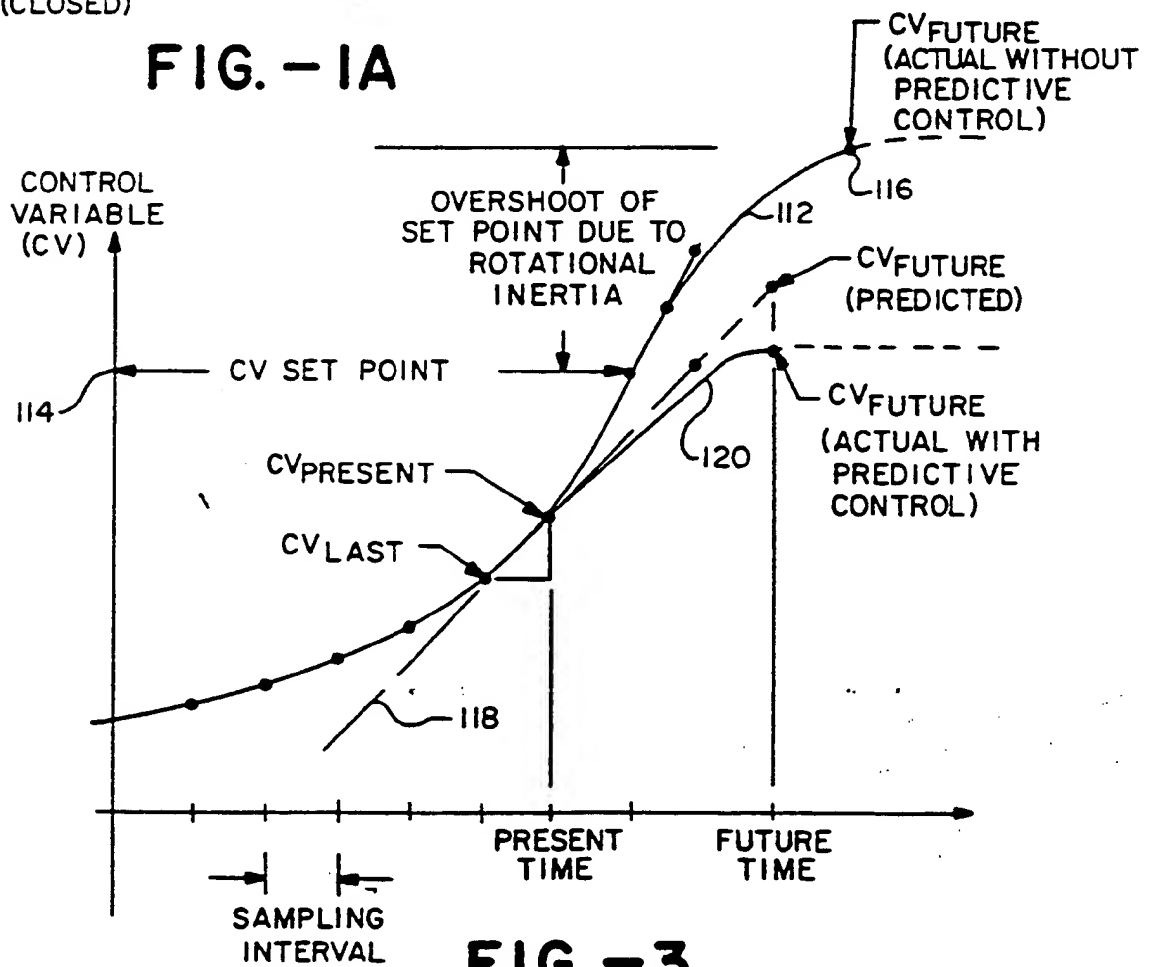


FIG. -2A



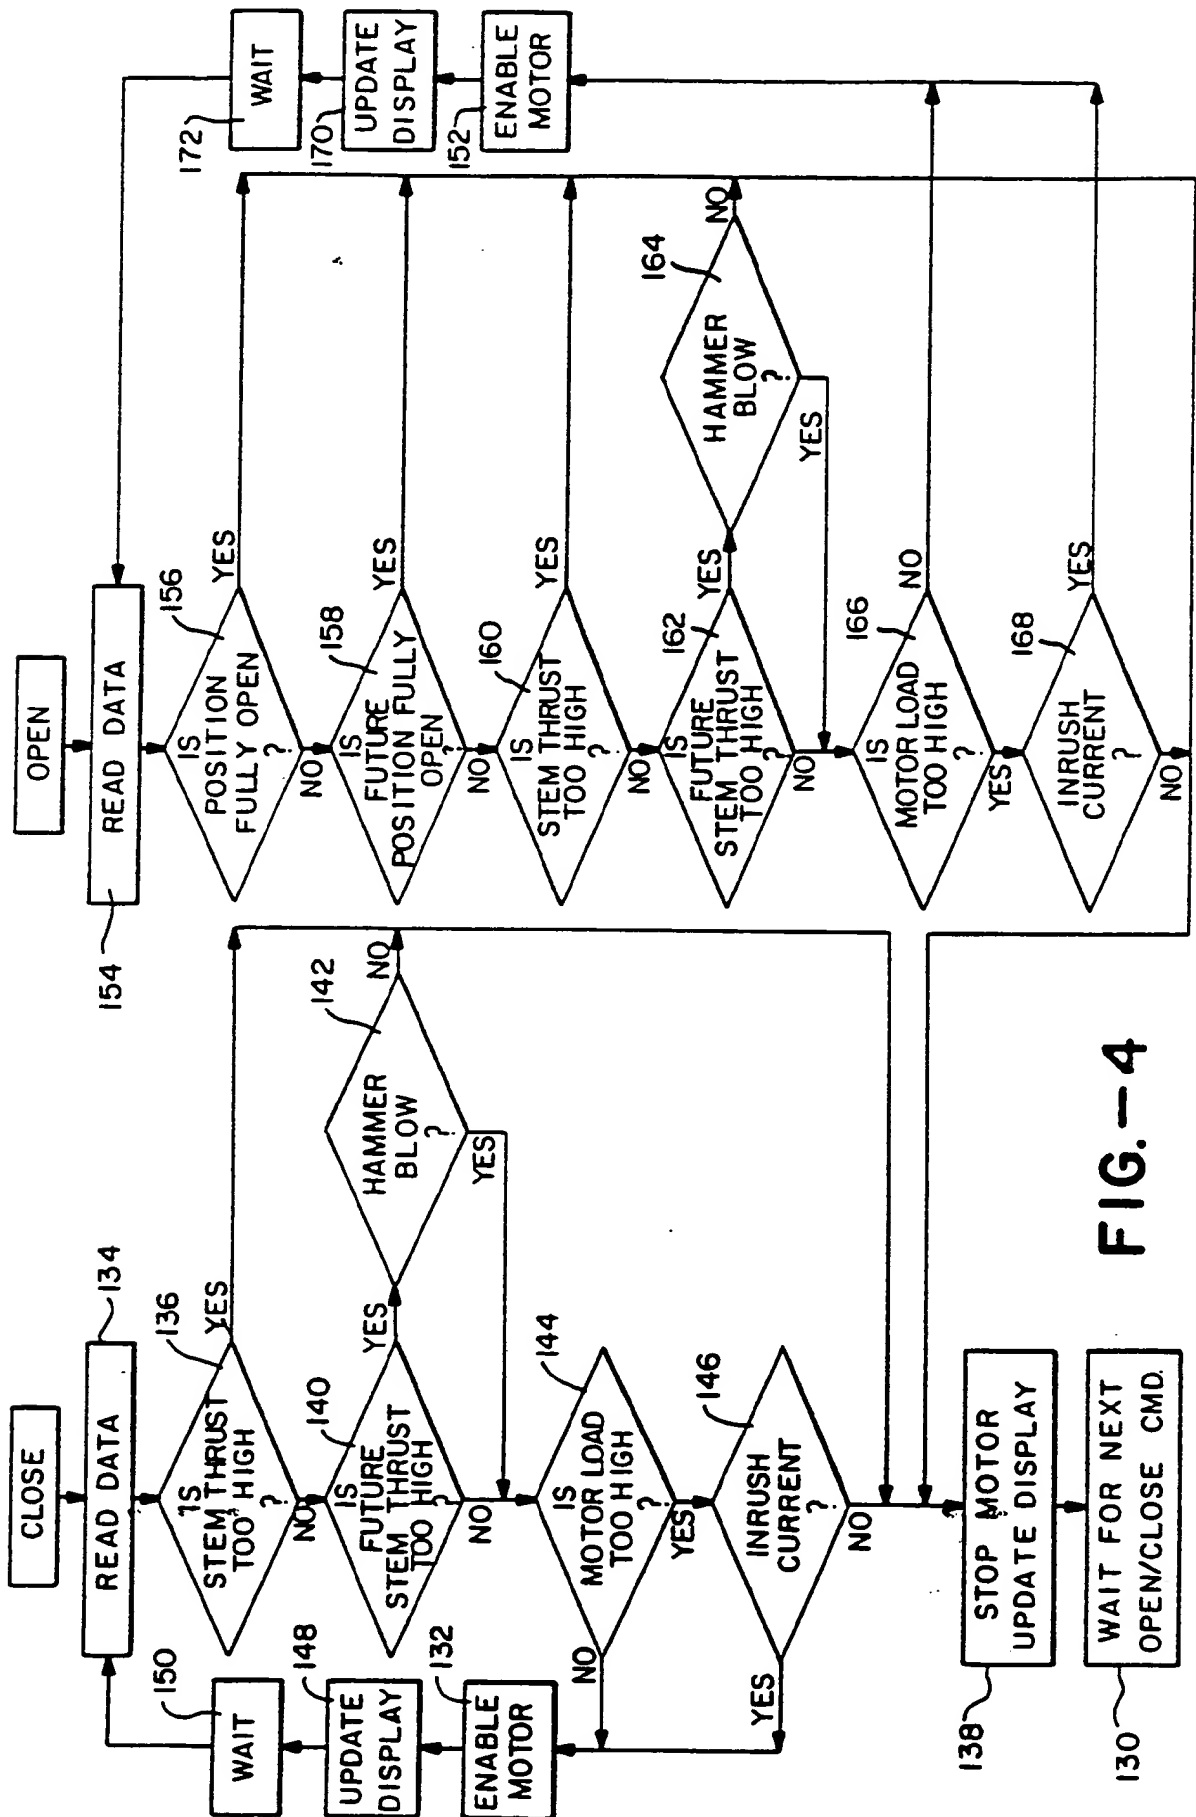
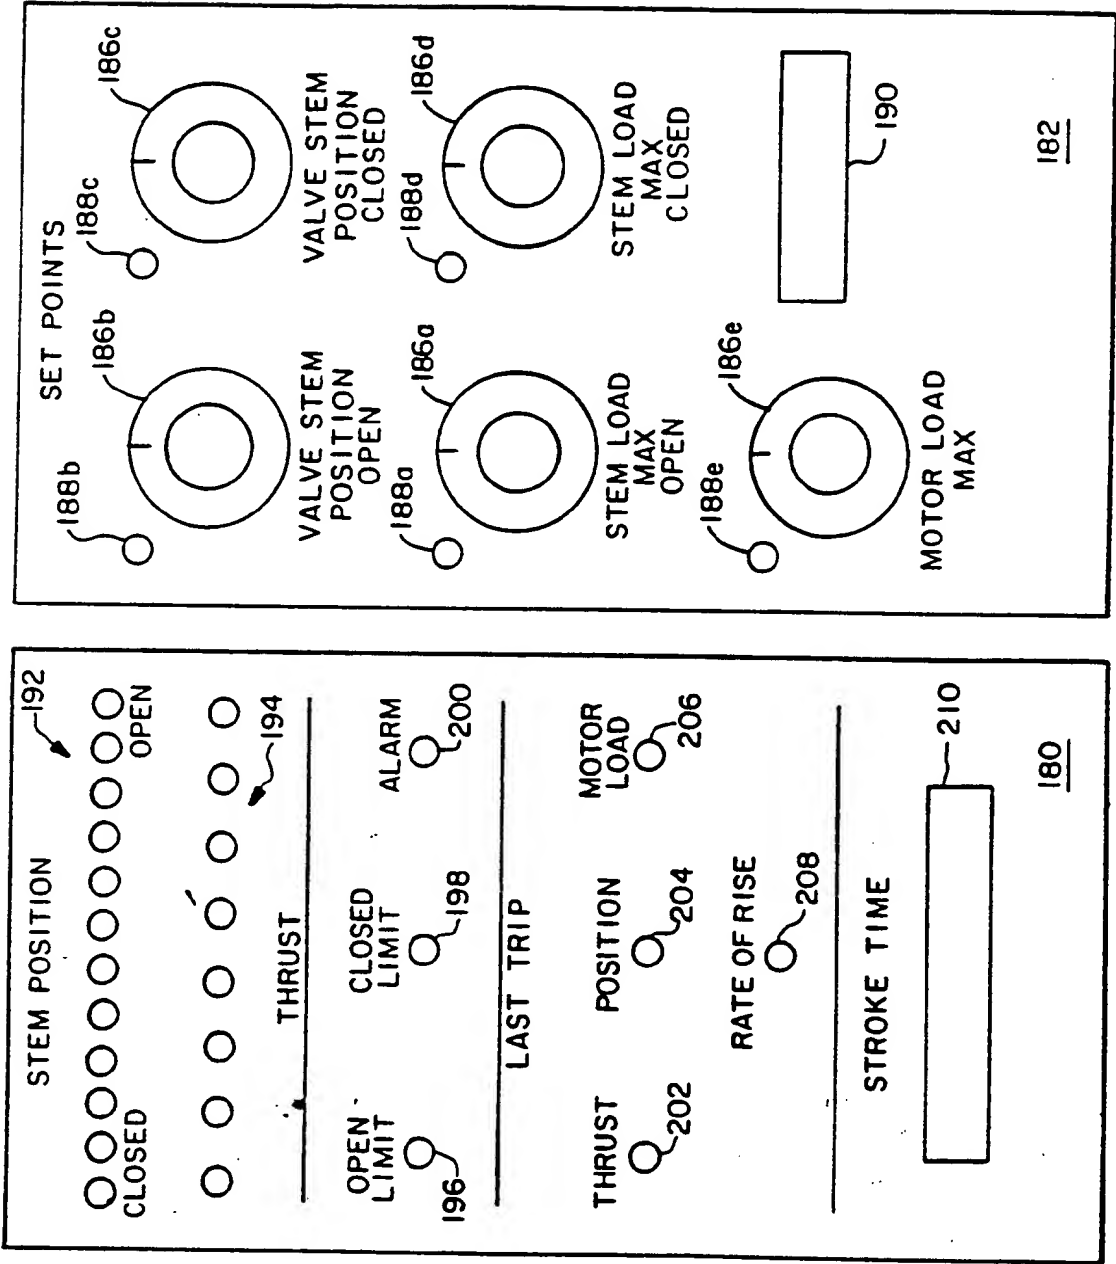
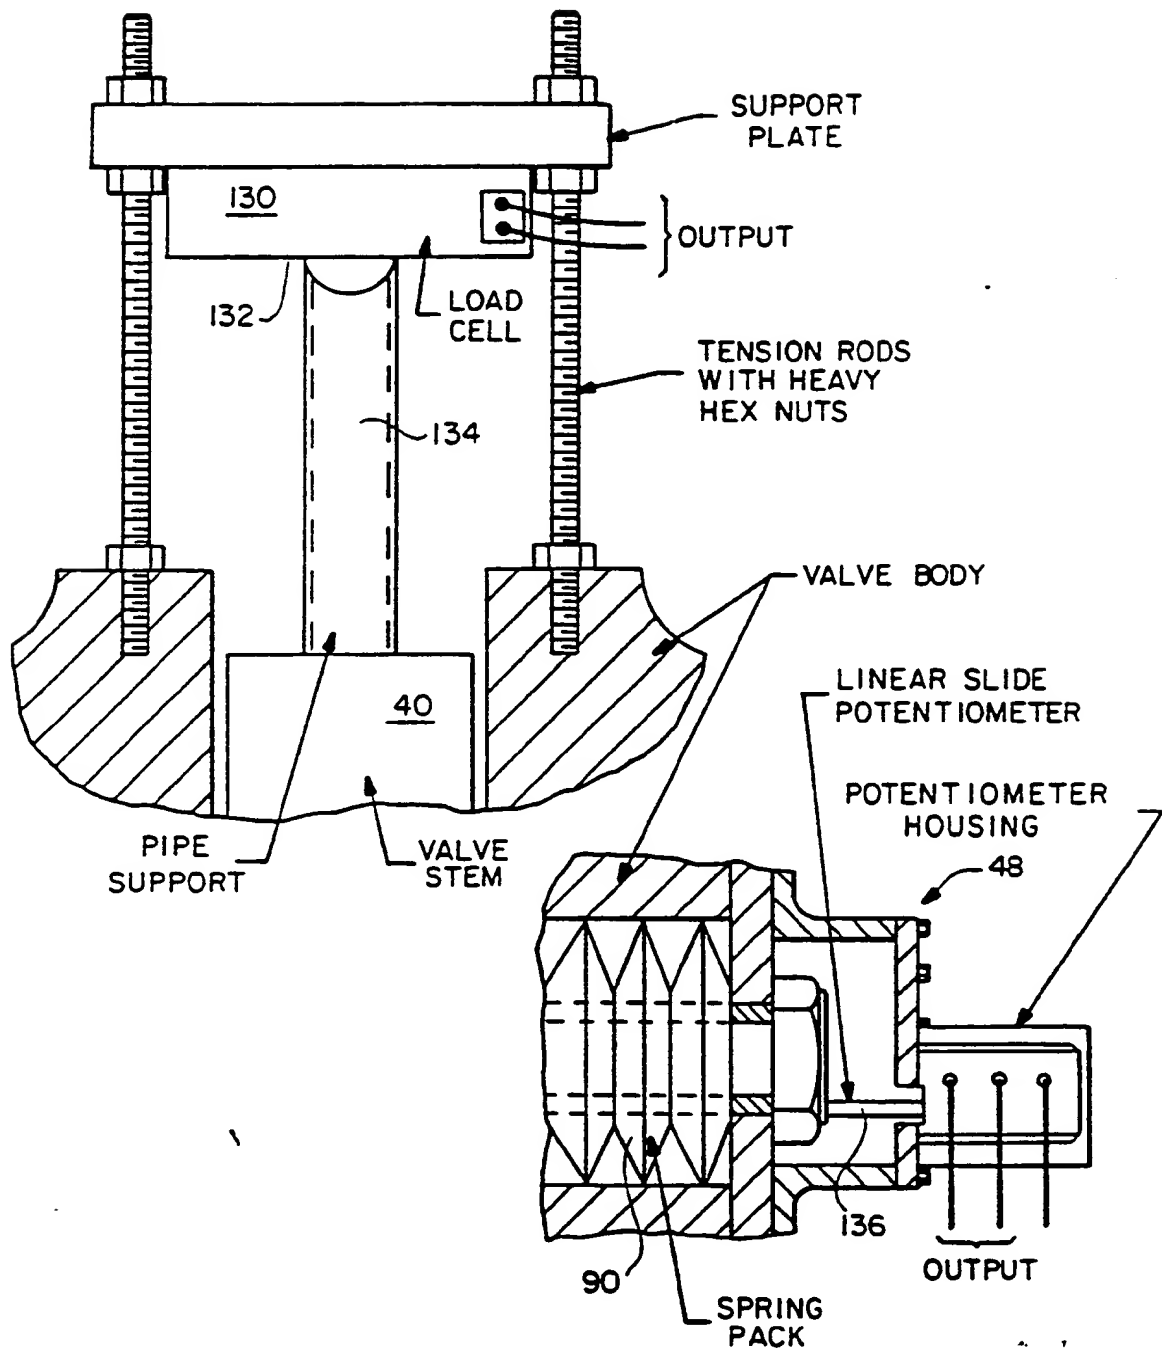


FIG. -4

FIG.-5



**FIG. - 6**

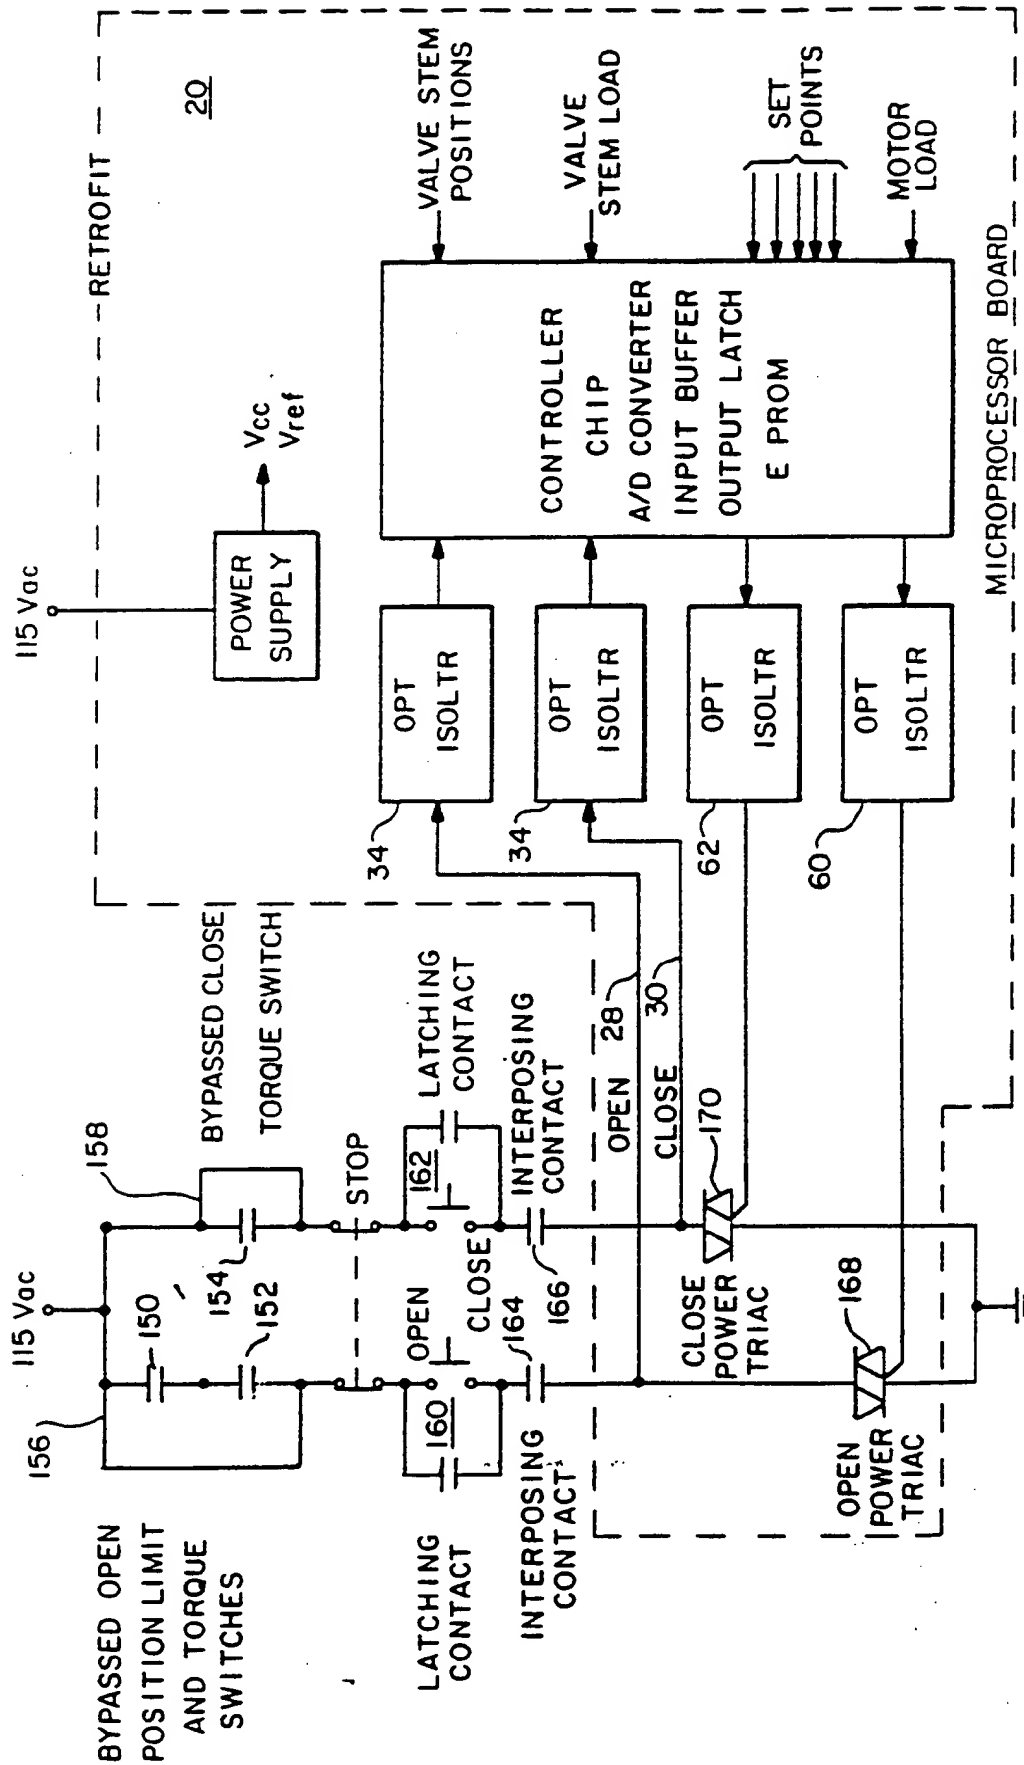
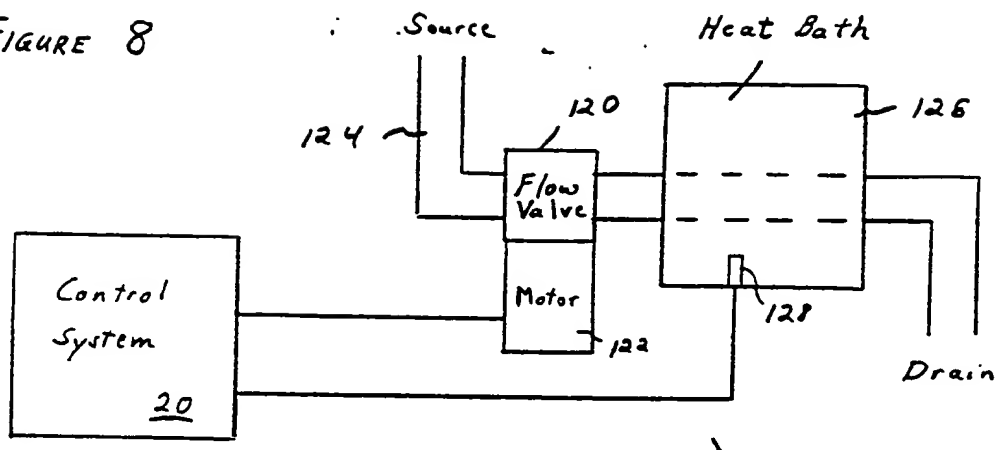


FIG.-7

FIGURE 8



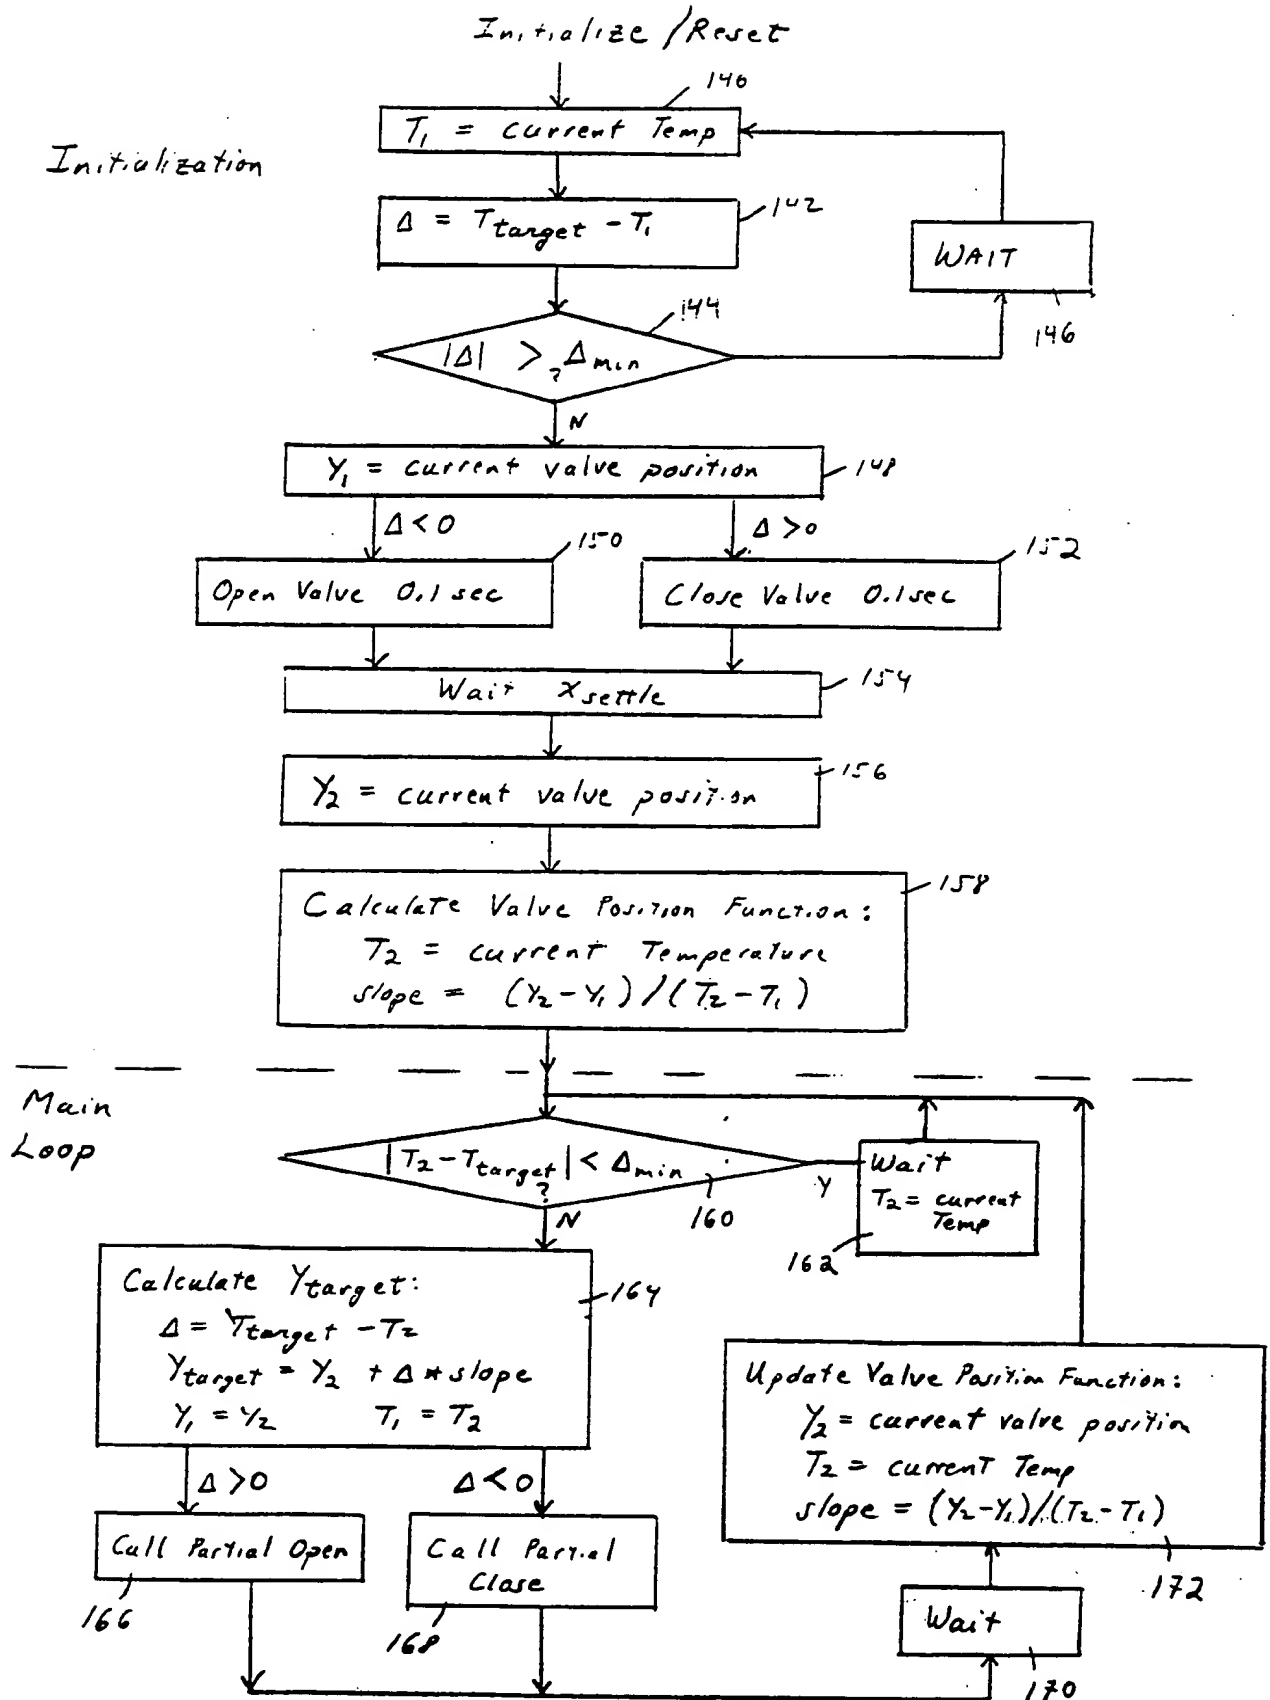


FIGURE 9

FIGURE 10


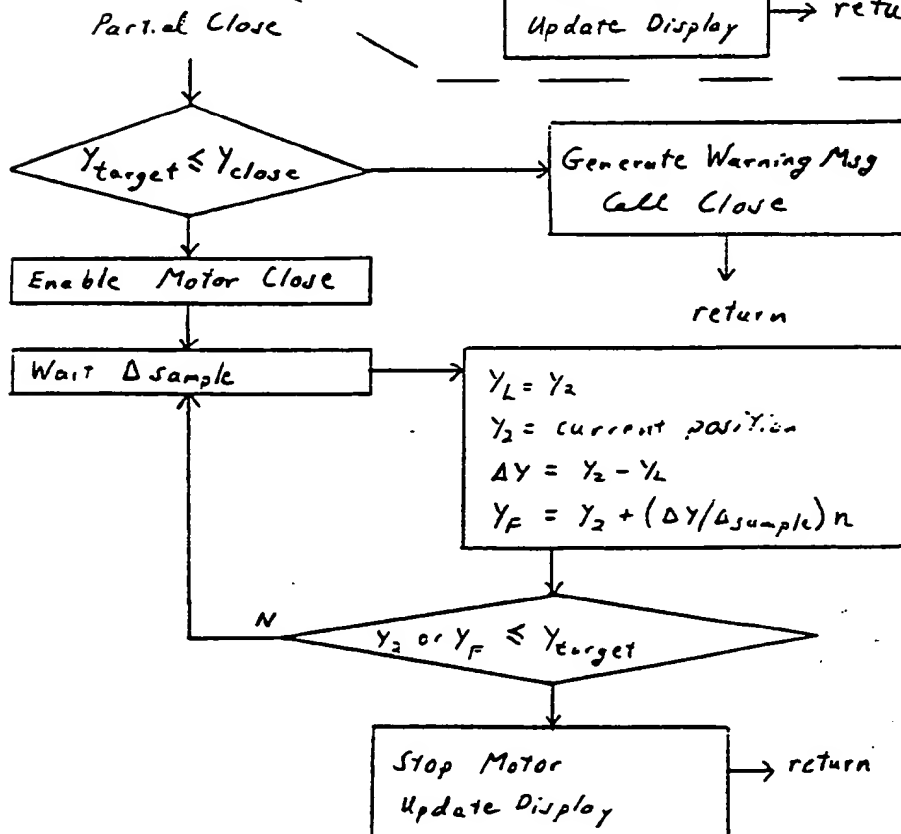


FIGURE 11

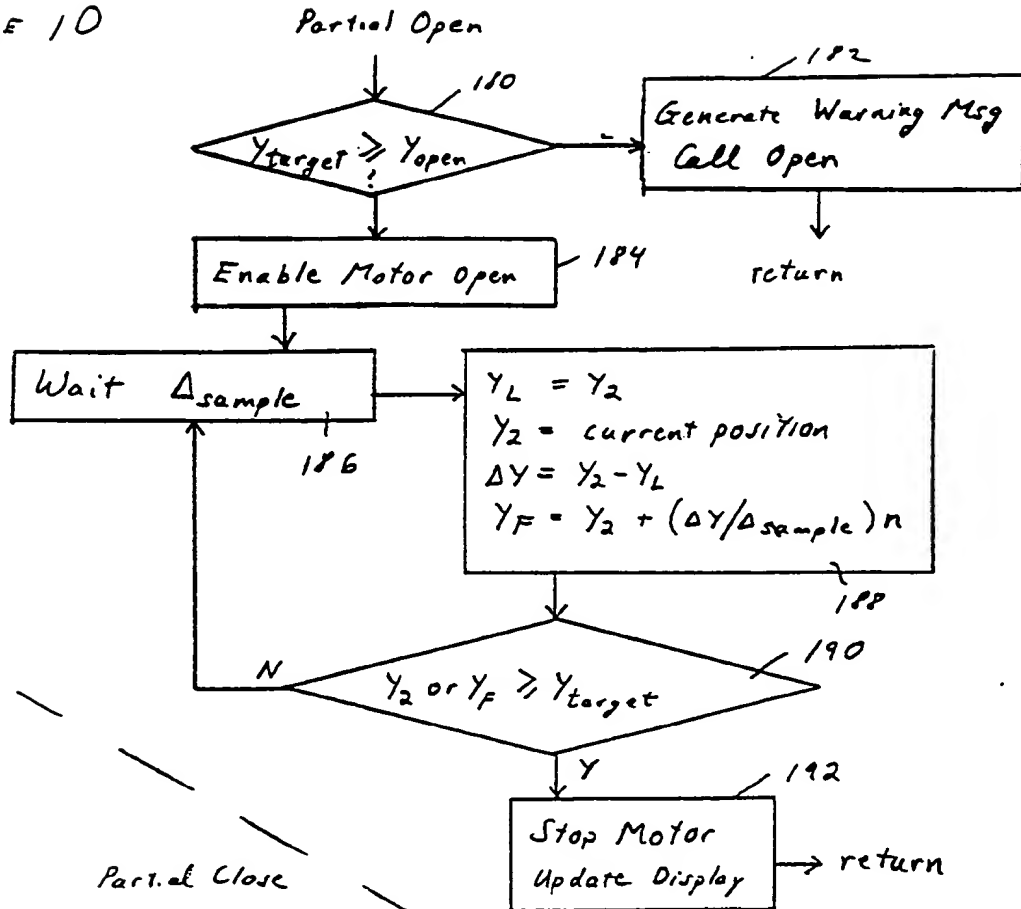

Europäisches Patentamt
European Patent Office
Office européen des brevets

Publication number:

0 287 299
A3

EUROPEAN PATENT APPLICATION

Application number: 88303211.2

Int. Cl.⁵: F16K 37/00, F16K 31/04

Date of filing: 11.04.88

Priority: 13.04.87 US 37414

Date of publication of application:
19.10.88 Bulletin 88/42

Designated Contracting States:
AT BE CH DE ES FR GB GR IT LI LU NL SE

Date of deferred publication of the search report:
30.05.90 Bulletin 90/22

Applicant: ELECTRIC POWER RESEARCH
INSTITUTE, INC

3412 Hillview Avenue
Palo Alto California 94303(US)

Inventor: Brooks, Boyd P.
219 Danville Drive
Los Gatos California 95030(US)
Inventor: Lee, Robert A.S.
138, Beach Street
Tewksbury Massachusetts 01876(US)

Representative: Jackson, David Spence et al
REDDIE & GROSE 16, Theobalds Road
London, WC1X 8PL(GB)


Microprocessor-based control and diagnostic system for motor operated valves.

A microprocessor (32) periodically tests the status of the stem (40) of the motor operated valve (22), and turns off the valve's motor (24) if certain predefined criteria for the valve stem position and the valve stem load are satisfied. A position sensor (46) provides a valve stem position signal and a predicted stem position signal is computed. The current and predicted positions are compared with a preselected target position. A stem load sensor (48) provides a current valve stem load signal, a predicted stem load is computed and the current and predicted loads are compared with a preselected maximum desirable stem load.

When the control system is being used to fully open and fully close a gate valve, the control logic can use either a predicted position criterion or a predicted stem load criterion to determine when to turn off the valve motor (24). When the control system is being used with a flow control valve, the use of a predicted position criterion minimizes overshoot problems which would cause the motor (24) to be reversed one or more times while moving to a target position.

A motor load sensor (70) allows periodic measuring of the actual load on the motor (24). The motor is turned off if the measured motor load exceeds any one of a plurality of preselected maxi-

imum motor load values for a corresponding predicted period of time.

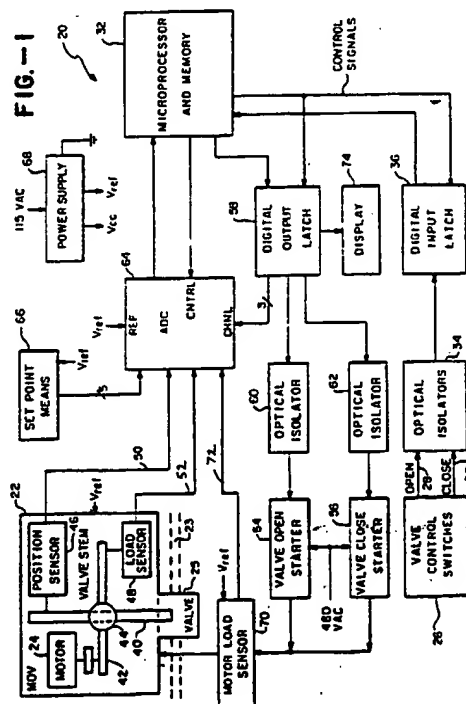



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 88 30 3211

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.4)
A	ATP - AUTOMATISIERUNGSTECHNISCHE PRAXIS, vol. 29, no. 1, 1987, pages 23-28, München, DE; U. HOFFMANN and N. WIESNER: "Einsatz eines adaptiven schaltenden Reglers an Temperaturregelstrecken" * Page 24, left-hand column, line 22 - right-hand column, line 11 *	1,3	F 16 K 31/04 F 16 K 37/00 G 05 B 19/407
A	EP-A-0 187 963 (CGEE ALSTHOM S.A.) * Claim 1 *	1	
A	EP-A-0 135 754 (K.K. S.G.) * Claim 1 *	1	
A	EP-A-0 105 203 (IMEC CORP.) * Claim 1 *	1	
A	EP-A-0 050 960 (C.F. NORTON)		
A	FR-A-2 533 333 (ETS. L. BERNARD)		TECHNICAL FIELDS SEARCHED (Int. Cl.4)
A	DE-A-3 345 528 (J. TECINSKY)		F 16 K 31/00 F 16 K 37/00 G 05 B 19/00 G 05 B 13/00
A	FR-A-2 330 058 (MESSERSCHMITT-BÖLKOW-BLOHM GmbH)		
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 14-03-1990	Examiner DE SMET F.P.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P0401)